

EFFECT OF IRRIGATION FREQUENCY UNDER HAND MOVE LATERAL AND SOLID SET SPRINKLER IRRIGATION ON WATER USE EFFICIENCY AND YIELD OF WHEAT

A. R. Eid*; M. E. Abuarab**

ABSTRACT

The water-use characteristics of wheat were studied in the field under sprinkler irrigation system. Treatments consisted of two sprinkler irrigation systems, solid set sprinklers (S_1) and hand move laterals (S_2), and three irrigation frequencies (IF_1 : once per week; IF_2 : twice per week, IF_3 : three times per week). Total irrigation amount values varied from 4558.160 to 5094.992 $m^3 \cdot ha^{-1}$ in 2009-2010 and 4792.457 to 5471.243 $m^3 \cdot ha^{-1}$ in 2010-2011. The highest seasonal ET was obtained from the S_2IF_3 treatment in 2010-2011 (5417.073 $m^3 \cdot ha^{-1}$); the lowest value was observed in the S_1IF_1 treatment in 2009-2010 (4513.029 $m^3 \cdot ha^{-1}$). On average, the S_1IF_3 treatment gave the highest grain yield (6000 $kg \cdot ha^{-1}$), whereas S_2IF_1 treatment gave the lowest grain yield (3332.500 $kg \cdot ha^{-1}$). The highest irrigation water use efficiency (IWUE) values were obtained from S_1IF_3 1.179 $kg \cdot m^{-3}$ and 1.151 $kg \cdot m^{-3}$ in 2009-2010 and 2010-2011, respectively, while the lowest values were obtained from S_2IF_1 0.710 $kg \cdot m^{-3}$ and 0.699 $kg \cdot m^{-3}$ in 2009-2010 and 2010-2011, respectively. The highest water use efficiency (WUE) values were obtained from S_1IF_3 1.191 $kg \cdot m^{-3}$ and 1.163 $kg \cdot m^{-3}$ in 2009-2010 and 2010-2011, respectively, while the lowest values were obtained from S_2IF_1 0.717 $kg \cdot m^{-3}$ and 0.706 $kg \cdot m^{-3}$ in 2009-2010 and 2010-2011, respectively. The highest nitrogen use efficiency (NUE), phosphorus use efficiency (PUE) and potassium use efficiency (KUE) were obtained under S_1IF_3 and the lowest value was obtained under S_2IF_1 . Soil water content varied apparently in the 0–40-cm soil layer. For winter wheat in the El-Nubaria, the recommended sprinkler system and irrigation frequency for each event is solid set sprinkler (S_1) and irrigation three times per week (IF_3).

Key words: Irrigation frequency, solid set sprinkler, hand move laterals, wheat, IWUE, WUE, soil moisture content.

* Assistant Professor, Water relations and field irrigation department, NRC, Giza, Egypt

** Assistant Professor of Irrigation and Drainage Eng.- Faculty of Agric.- Cairo Univ.

1. INTRODUCTION

Irrigated agriculture produces about 40% of all food, and consumes 69% of all freshwater resources (**FAO, 2000**). Global population growth is expected to increase the demand for cereals including rice and wheat by 1.27% annually between 2000 and 2025 (**Rosegrant and Cai, 2000**). To meet the projected demand for food, irrigated agriculture will require an increase of 17% in freshwater resources (**Seregeldin, 1999**).

In many arid and semi-arid countries where population growth is high, and freshwater is in short supply, there is pressure on the agricultural sector to reduce its water consumption and make it available for the urban and industrial sectors. This drives the demand to produce cereals, especially rice and wheat, using lower amount of irrigation water.

Wheat is one of the most important crops in the world. Well-drained clay loam, loam, and sandy loam soils are particularly suitable for this crop. Therefore, proper management of inputs particularly irrigation water using modern technology is essential for maximizing production and for providing high returns to farmers. Provided the area of cropped land does not increase, increasing water use efficiency is one of the most important ways to increase crop production, save water and protect the environment (**Haijun Liu et al., 2011**). Wheat is quite sensitive to water stress. Therefore, it needs frequent irrigation for good growth and yield (**Mishra et al., 1995; Alderfasi and Nielsen, 2001**).

Irrigation frequency refers to the number of days between irrigation during periods without rainfall. It depends on consumptive use of rate of a crop and on the amount of available moisture in the crop root zone. It is function of crop, soil and climate. Sandy soils must be irrigated more often than fine texture deep soils. A moisture use ratio varies with the kind of crop and climate conditions and increases as crop grows larger and days become longer and hotter.

Irrigation frequency is one of the most important factors in pressurized irrigation scheduling. Due to the differences in soil moisture and wetting pattern, crop yields may be different when the same quantity of water is applied under different irrigation frequencies. Typically, the higher the irrigation frequency the smaller the wetted soil volume and the higher

mean soil water content can be maintained in the wetted soil volume during a period when the total irrigation water is equal. High irrigation frequency might provide desirable conditions for water movement in soil and for uptake by roots (Segal et al., 2000). Several experiments have shown positive responses in some crops to high frequency drip irrigation (Freeman et al., 1976; Segal et al., 2000; Sharmasarkar et al., 2001). However, seeming inconsistencies as to what frequency might be optimum can also be found in the literature. Dalvi et al. (1999), found that the maximum yield was obtained at every second day frequency.

The irrigation frequency had significant effect on yields of field grown green bean under the Mediterranean climatic conditions in Egypt. The number of frequencies per each irrigation had significant effect on yield and nutrients concentration in the soil. The results indicated that WUE and IWUE values decreased with decreasing irrigation frequencies. It was found that the highest concentration of all determined nutrient elements was obtained in the high irrigation frequency. While, the lowest concentration was obtained in the low irrigation frequency (Abuarab et al., 2011).

A study on irrigation frequency in potato showed that irrigation frequency did affect soil water distribution under potato depending on potato growing stage, soil depth and distance from the emitter. Potato root growth was also affected by drip irrigation frequency to some extent: the higher the frequency, the higher was the root length density in 0–60 cm soil layer and the lower was the root length density in 0–10 cm soil layer. On the other hand, potato roots were not limited in wetted soil volume even when the crop was irrigated at the highest frequency. High frequency irrigation enhanced potato tuber growth and water use efficiency (WUE). Reducing irrigation frequency resulted in significant yield reductions by 33.4 and 29.1% (Wang et al., 2006).

Sprinkler irrigation is an advanced irrigation technique for water-saving and fertigation and in accurately controlling irrigation time and water amount (Li and Rao, 2003). Study on winter wheat showed that crop yield and water use efficiency in sprinkler-irrigated fields was higher than that in surface irrigated fields (Yang et al., 2000). The result of high crop yield and water use efficiency in sprinkler-irrigated field is partly

because sprinkler irrigation can produce a favorable microclimate for crop growth. **Tolk et al. (1995)** found sprinkler irrigation resulted in crop transpiration reduction by more than 50% during irrigation process. The increasing in photosynthesis rate and reduction in leaf respiration rate at night also has been found in sprinkler-irrigated area (**Chen, 1996; Yang et al., 2000**).

The nutrient concentrations in the rhizosphere may be high or even excessive immediately after irrigation and may fall to deficit levels as time proceeds (**Xu et al., 2004**). Reducing the time interval between successive irrigations in order to maintain constant, optimal water content in the root zone may reduce the variations in nutrient concentration, thereby increasing their availability to plants (**Silber et al., 2003**).

The specific objectives of the study were (1) To study the effects of irrigation frequency on root zone soil water status, growth, yield parameters, and water use efficiency of wheat; (2) To recommend an effective irrigation water management strategy for wheat grown in arid regions, particularly under conditions of water limitation.

2. MATERIALS AND METHODS

2.1. Site description

Field experiments were conducted during two wheat seasons from December to May of 2009–2011 at the experimental farm of National Research Center, El-Nubaria, Egypt (latitude 30.8667N, and longitude 31.1667E, and mean altitude 21 m above sea level).

The experimental area has an arid climate with cool winters and hot dry summers prevailing in the experimental area. **Table (1)** summarizes the monthly mean climatic data for the two growing seasons 2010 and 2012, respectively, for El-Nubaria city, which are nearly the same. The data of maximum and minimum temperature, relative humidity, and wind speed were obtained from “The Central Laboratory of Meteorology” which is related to The Ministry of Agriculture. There was not rainfall that could be taken into consideration through the two seasons, because the amount was very little and the duration didn't exceed few minutes.

2.2. Soil physical and chemical properties

The soil of experimental site is classified as sandy soil. Some of the physical and chemical properties of the experimental soil are displayed in Table 2 and Table 3 respectively. Irrigation water was obtained from an irrigation channel going through the experimental area, with pH 7.35, and an average electrical conductivity of 0.41 dS m⁻¹.

Table 1. Monthly and growing season climatic data of the experimental site

Month	Growing season	Solar radiation (W/m ²)	Precipitation (mm)	Wind speed (m/sec)		Air temp (°C)			Relative Humidity (%)
				Aver.	Max.	Aver.	Min.	Max.	
December	2009-2010	49.4	0.2	1.8	4.7	15.6	8.9	22.2	63.3
January		49.7	0.0	2.3	6.0	14.7	8.3	21.4	61.0
February		67.5	0.1	2.1	5.8	16.7	9.3	24.5	57.7
March		93.5	18.6	2.2	5.5	18.3	11.0	26.2	60.0
April		111.0	0.0	2.3	7.6	20.8	12.8	28.8	52.3
May		130.0	0.0	1.4	4.2	20.6	12.7	27.6	49.0
December	2010-2011	49.5	0.0	2.0	4.8	19.74	9.10	22.55	63.4
January		50.0	1.2	2.5	6.2	15.25	7.31	24.13	66.0
February		68.0	2.6	2.3	6.0	16.4	7.17	26.39	56.0
March		95.0	0.0	2.5	5.8	17.61	8.19	28.26	56.0
April		113.0	0.0	2.4	7.8	21.23	10.87	30.55	50.0
May		135.0	0.0	1.6	4.5	24.83	14.29	33.8	47.0

Table 2. Soil physical characteristics of experimental site

Soil depth (cm)	Particle size distribution			Texture class	SP. (%)	F.C. (%)	W.P. (%)
	Coarse Sand	Fine sand	Clay + Silt				
0 - 20	47.76	49.75	2.49	Sandy	21.0	10.1	4.7
20 - 40	56.72	39.56	3.72	Sandy	19.0	13.5	5.6
40 - 60	36.76	59.40	3.84	Sandy	22.0	12.5	4.6

Table 3. Soil chemical properties of experimental site

Soil depth	OM (%)	pH (1:2.5)	EC (dSm ⁻¹)	CaCO ₃ (%)
0 - 20	0.65	8.7	0.35	7.02
20 - 40	0.40	8.8	0.32	2.34
40 - 60	0.25	9.3	0.44	4.68

2.3. Experimental details

The water resource for irrigation comes from an irrigation channel under rotational irrigation where the water exist in the channel just for three days every week and the residual four days the channel is empty, the idea was to expert the availability to apply water more than once per week and to evaluate its effect on water saving, irrigation water use efficiency (IWUE), yield and growth

characteristics and financial parameters using two types of sprinkler systems, solid set and hand move laterals and three irrigation frequency treatments, each treatment replicated three times.

The variables of irrigation frequency were to apply irrigation water once per week (IF₁) which represents the control, twice per week (IF₂) and three times per week (IF₃). The treatments and replications are shown in (Fig. 1).

For the sprinkler irrigation treatments, each replicate subplot was 60 m × 24 m layout. There was 3m spacing between subplots. Each subplot was irrigated using 90^o, 180^o and 360^o angle sprinklers, the sprinkler is a metal impact sprinkler 3/4" male (NAAN Sprinkler 233 A-S, Israel) with a discharge of 1.170 m³h⁻¹, wetted radius of 13.5m, working pressure of 300 kPa and irrigation intensity of 8.10 mmh⁻¹.

The irrigation system's control unit had a two sand filters (Amiad, Israel), 3 inch inlet/outlet diameter, 36 inch vessel diameter, 35-50 m³h⁻¹ and 200kg vessel weight (empty), and screen filter 200 mesh. Flow-meter and a pressure regulated valve were installed at the head of the irrigation system to measure the applied water and to control the system pressure. After the filtration system the solid set sprinkler irrigation system had 27 laterals 60 m long installed on a 1.944ha field (approximately, 324 m long and 60 m wide) with an average slope of 0.0 %.

The hand move laterals system had the same area but just 3 laterals were installed at each irrigation event with the same laterals length and sprinklers spacing.

A good procedure for the irrigator was followed when moving the lateral from one setting to the next by start moving the valve-opening elbow and the section of pipe connected to it. As soon as these pieces are in place at the new location, the valve was slightly opened so a very small stream of

water runs out at the end of the first pipe section. As each subsequent section of pipe was put into place, the small stream of water runs through it, flushing out any soil or debris that may have been picked up during the move. The last section of pipe with its end plug in place was connected before the stream of water reaches the end and builds up pressure. Then the irrigator walks back along the lateral, correcting any plugged sprinklers, leaky gaskets, or tilted risers. After returning to the main line, the valve was opened further until the desired pressure was obtained. A quick check was applied with a pitot gauge on the first sprinkler confirms the valve adjustment. To save time on each lateral move, there is a tendency to completely open the valve and fill the line as quickly as possible. This causes water hammer at the far end of the line, so a surge plug at that end was installed.

2.4. Cultural practice

The experimental field was ploughed before planting. First disc harrow, then duck food was used for further preparation of the field for planting. A combined driller that facilitated concurrent application of fertilizer and seeds was used.

A wheat variety (Sakha-93) was planted on 6 December on both growing seasons 2009-2010 and 2010-2011, respectively. The driller setting was such that it is applied 250 kg of seed per hectare, at 5 cm soil depth with 13.5 cm row spacing.

Fertilizer applications were based on soil analysis recommendations. All treatment plots received the same amount of total fertilizer. A compound fertilizer was applied according to (Taha, et al., 1999) as follow: 285 kg N ha⁻¹ as ammonium nitrate, ten percent applied to the soil before planting and at tillering, the remainder being applied in irrigation water, 70 kg P₂O₅ ha⁻¹ as single superphosphate applied to the soil in two equal doses before planting and at tillering and 115 kg K₂O ha⁻¹ as potassium sulphate applied in three doses (half applied to the soil before planting, one quarter at tillering and one quarter during the growing season in irrigation water).

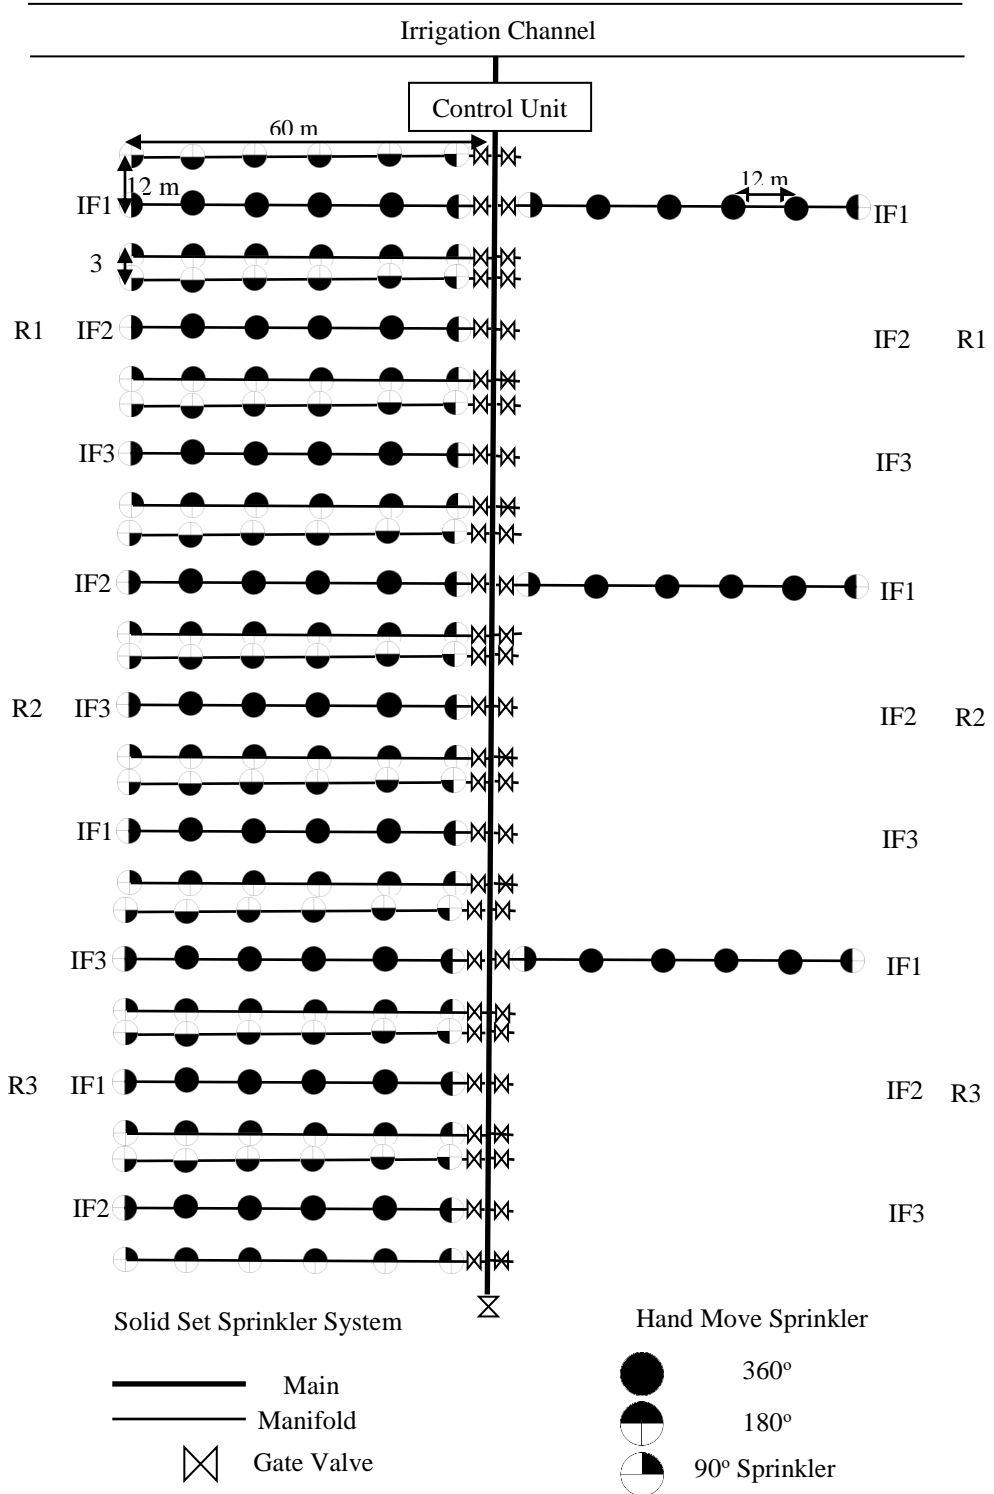


Figure 1. Experiment Layout

2.5. Crop parameters

Leaf area, plant density and above ground biomass were measured every 5–7 days from December to February in each season. For each measurement, 25 plants were selected randomly from the experiment replicates for each treatment. The plant density for each treatment was determined as the mean value of three 1m long crop samples. Leaf area was determined using the leaf length and the maximum width. The calibrated relationship between the leaf area and the length and width was $LA = 0.7634 \times L \times W$ ($R^2 = 0.967$, $n = 18$), where LA is leaf area, L and W are length and maximum width, respectively, n is the number of leaves. Crop yield for each treatment was measured by randomly collecting five samples. Therefore, each treatment has 15 samples for the three replicates. Each sample area was 1m^2 .

2.6. Soil Moisture Monitoring

Soil water was measured daily using a profile probe calibrated by using the gravimetric method. The TDR Profile Probe consists of a sealed polycarbonate rod ($\approx 25\text{mm}$ diameter), with electronic sensors (seen as pairs of stainless steel rings) arranged at fixed intervals along its length. Irrigation was carried out between 7:00 h am and 12:00 h, based on the readings from the TDR. The soil moisture distribution pattern was plotted according to daily measurements of soil moisture content before and after irrigation for one week.

To draw the soil moisture distribution as contour lines and the soil water movement within the whole soil profile, surfer software was used. Surfer is a software package transforms 3D data to create contour maps. The data was inserted to the model in XYZ coordinates format, where X represented the profile probe access tubes locations or sites (0, 2, 4, 6, 8, 10 and 12m) with respect to the sprinkler, Y represented the investigated soil depths (0, 10, 20, 30, 40cm) which represents the effective root depth, and Z was the soil moisture content values.

2.7. Data Recording

Weather data was recorded from an adjacent weather station. Growth and development parameters such as plant height, leaf area and reproductive parameters. The dry matter data for leaf, stem, and roots was derived

from final plant harvest. Evapotranspiration (ET) was calculated with the water balance equation (Eq. (1)):

$$ET = I + P \pm \Delta SW - D_p - R \quad (1)$$

Where ET is the evapotranspiration (mm), I the amount of irrigation water applied (mm), ΔSW the soil water content changes (mm), D_p the deep percolation (mm), and R is the amount of runoff (mm). Since the amount of irrigation water was controlled, deep percolation and runoff were assumed to be negligible.

Water-use efficiency (WUE) and irrigation water-use efficiency (IWUE) values were calculated with Eqs. (2) and (3), respectively (**Howell et al., 1990**).

$$WUE = \left(\frac{E_y}{E_t} \right) \times 100 \quad (2)$$

Where WUE is the water use efficiency ($t \text{ ha}^{-1} \text{ mm}$); E_y is the economical yield ($t \text{ ha}^{-1}$); E_t is the plant water consumption, mm.

$$IWUE = \left(\frac{E_y}{I_r} \right) \times 100 \quad (3)$$

Where IWUE is the irrigation water use efficiency ($t \text{ ha}^{-1} \text{ mm}$), E_y is the economical yield ($t \text{ ha}^{-1}$), I_r is the amount of applied irrigation water (mm).

Nitrogen use efficiency (NUE) is an important topic when discussing fertilizer application and plant growth. Nitrogen use efficiency is defined as production per unit of N available in the soil. This is represented by the amount of grain or forage produced divided by the amount of N supplied to the plant by the soil (**Moll et al., 1982**). The same way of calculating NUE was applied for calculating phosphate use efficiency (PUE) and potassium use efficiency (KUE).

Leaf area was calculated by multiplying leaf length by maximum leaf width by 0.75 according to **Stickler et al (1961)**.

The chlorophyll was measured by using "Minolta Chlorophyll Meter", SPAD-502 (Spectrum Technologies).

Protein content as a percentage was determined by multiplying N-content in seeds by 6.25 according to **Chapman and Pratt (1978)**.

2.8. Evaluation Parameters

Uniformity of irrigation water distribution under square layout was measured three times by using containers with 20cm in diameter and 7cm in depth placed along the two diagonals at intervals of 1m before each measurement. The coefficient of uniformity, computed using Christiansen method (**Christiansen, 1942**), ranged from 0.85 to 0.92 under low wind conditions (less than 2.0ms^{-1}).

$$CU = 100 \left(1.0 - \frac{\sum_{i=1}^n |z - m|}{\sum_{i=1}^n z} \right) \quad (5)$$

Where CU is the Christiansen uniformity coefficient, z is the individual depth of catch observations from uniformity test (mm), m is the mean depth of observations (mm) and n is the number of observations (**Keller and Bliesner, 1990**).

2.9. Statistical Analyses

Statistical analysis was done by standard analysis of variance (ANOVA) with SPSS 11.5 software (**SPSS Inc., Chicago, IL, USA**). Least significant difference (LSD) method was used to determine whether differences existed among mean growth characteristic, yield, WUE and IWUE of winter wheat among experimental treatments for each season. The probability level for determination of significance was 0.05.

3. RESULTS AND DISCUSSION

3.1. Irrigation

The results of total irrigation water amount are shown in **Table 4**. Treatments S_1IF_1 and S_2IF_1 received the lowest amount of water and treatments S_1IF_3 and S_2IF_3 received the highest amount of water, respectively, throughout the entire experiment.

Total irrigation water amount (I) was in general higher in the treatments irrigated with high amount of water than those irrigated with low amount of water. Irrigation water amount (I) values of the IF_3 treatment were higher than those of the IF_1 and IF_2 treatments under both sprinkler irrigation systems (**Table 4**). This might be because plants were not suffered from water deficit in short irrigation intervals. According to

Radin et al. (1989), frequent irrigations prevent the large fluctuation in plant water stress caused by infrequent irrigations.

3.2. Wheat yield

The biological and grain yield of wheat based on 2 years, irrigation frequencies and sprinkler irrigation systems are given in **Table 4**. There was a statistically no significant difference in biological and grain yield between the years ($P < 0.05$) possibly due to that there was not a notable climate differences. The effect of irrigation frequency was statistically significant effects ($P < 0.05$) on wheat yield. The maximum grain yield of wheat was found in 2010-2011 ($6000 \text{ kg}\cdot\text{ha}^{-1}$) under S_1IF_3 treatment whereas the lowest grain yield was found in 2009-2010 ($3332.500 \text{ kg}\cdot\text{ha}^{-1}$) under S_2IF_1 treatment (**Table 4**).

Table 4. Total irrigation water amount (I), plant water consumption (ET), Biological yield, grain yield, irrigation water use efficiency and water use efficiency in different years and treatments

Growing season	Treatments	I (m ³ /ha)	ET (m ³ /ha)	Biological yield (Kg/ha)	Grain yield (Kg/ha)	IWUE (kg/m ³)	WUE (kg/m ³)
2009-2010	S_1IF_1	4558.160	4513.029	9917.500 c	3917.50 cd	0.859 d	0.868 a
	S_1IF_2	4666.763	4620.557	12250.000 b	5082.500 b	1.089 b	1.100 d
	S_1IF_3	4946.594	4897.618	13917.500 a	5832.500 a	1.179 a	1.191 b
	S_2IF_1	4694.904	4648.420	7417.500 d	3332.500 d	0.710 e	0.717 b
	S_2IF_2	4806.766	4759.174	10000.000 c	4167.500 c	0.867 c	0.876 d
	S_2IF_3	5094.992	5044.546	12582.500 b	5082.500 b	0.998 b	1.008 c
	L.S.D.	ns	ns	0.532	0.248	0.03238	0.01603
2010-2011	S_1IF_1	4792.457	4745.007	9832.500 c	3750.00 cd	0.782 d	0.790 e
	S_1IF_2	5041.229	4991.316	12417.500 b	5250.000 b	1.041 b	1.052 b
	S_1IF_3	5210.708	5159.117	13832.500 a	6000.000 a	1.151 a	1.163 a
	S_2IF_1	4888.306	4839.907	7500.000 d	3417.500 d	0.699 e	0.706 f
	S_2IF_2	5142.054	5091.142	10082.500 c	4417.500 c	0.859 c	0.868 d
	S_2IF_3	5471.243	5417.073	12667.500 b	5250.000 b	0.960 b	0.969 c
	L.S.D.	ns	ns	0.531	0.247	0.02921	0.00907
2009-2010		4794.696	4747.224	11014.167	4569.167	0.950	0.960
2010-2011		5091.000	5040.594	11055.417	4680.833	0.916	0.925
L.S.D.		0.001	0.010	ns	ns	0.001	0.008

Note: Numbers followed by different letters are statistically different ($P < 0.05$).

3.3. Irrigation water use efficiency

Applied irrigation water varied from 4558.160 to 5094.992 m³.ha⁻¹ in 2009-2010, and 4792.457 to 5471.243 m³.ha⁻¹ in 2010-2011. IWUE values varied from 0.0.710 to 1.179 kg.m⁻³ in 2009-2010 and from 0.699 to 1.151 kg.m⁻³ in 2010-2011. WUE values varied from 0.717 to 1.191 kg.m⁻³ in 2009-2010 and from 0.706 to 1.163 kg.m⁻³ in 2010-2011. On the other hand, IWUE and WUE values in the treatments with the high total water application were generally high. The irrigation water use efficiency data showed that wheat plants use water efficiently during the vegetation period.

The ET value increased markedly when total irrigation water amount (I) was raised (Table 4). The highest seasonal evapotranspiration was obtained from the S₂IF₃ treatment in 2009-2010 (5044.546 m³.ha⁻¹), whereas the lowest value was obtained from the S₁IF₁ treatment in the same growing season (4513.029 m³/ha). The other treatments had ET values between these extremities.

There was a statistically significant difference in total irrigation water amount (I), plant water consumption (ET), irrigation water use efficiency (IWUE) and water use efficiency (WUE) between the years (P < 0.05).

Kanber et al. (1991) reported that the amount of irrigation water decreased when IWUE and WUE values increased. Studies have shown that frequently applied low irrigation water increases the yield because ET was higher when irrigation started at low soil water tensions (**Stansell and Smittle, 1989**). **Goldberg et al. (1976)** stated that irrigation period was more effective than the total amount of water applied, when plants were irrigated with a limited amount of water in early growth stage because of higher photosynthetic efficiency and vegetative growth. In this study, IWUE and WUE values from S₁IF₁ to S₁IF₃ and from S₂IF₁ to S₂IF₃ have been generally increased. This indicates that wheat uses water economically. These findings agree with those of **Dallyn (1983)**.

On over all the values of solid set sprinkler (S₁) were higher than of those under hand move laterals (S₂) which represented the applied systems by

farmers. This is related to that, the distribution uniformity under hand move laterals which was low because there was an overlapping just between sprinklers along laterals not overlapping between sprinklers along laterals and between laterals which made a square plan. The second reason is related to the long irrigation period related to transform lateral to another location which make an obligation to irrigate under high temperature and which accordingly increase water losses through evaporation. On the other hand solid set sprinkler (S_1) was irrigated the whole area at the same time approximately from 7:00 to 9:00 am so the water losses through evaporation were almost negligible.

3.4. Vegetative growth parameters

Plant height values varied from a low of 115.17 cm to maximum of 123.17 cm in the experimental years. Plant height increased with increasing irrigation frequency (Table 5). Highest plant height value was obtained from S_1IF_3 in the experimental years. Plant height decreased with decreasing irrigation frequency under both sprinkler systems.

The mean number of leaves per plant values varied from a low of 3.667 to maximum of 6.00 in the experimental years (Table 5). Highest number of leaves per plant was obtained from S_1IF_3 for both growing seasons. The number of leaves per plant values decreased with decreasing irrigation frequency.

Flag leaf area per plant varied from 20.667 to 31.667 cm² in 2009-2010, and 21 to 31.333 cm² in 2010-2011. The highest flag leaf area was obtained under S_1IF_3 treatment and the lowest flag leaf area was obtained under S_2IF_1 . The flag leaf area increased with increasing irrigation frequency and it was higher under solid set sprinkler (S_1) compared with hand move laterals (S_2) (Table 5).

Dry weight per plant varied from 4.233 to 5.333 g in 2009-2010, and 4 to 5.4 g in 2010-2011. The highest dry weight value was obtained under S_1IF_3 and the lowest value was obtained under S_2IF_1 .

Table 5. The vegetative growth parameters of wheat in different years and treatments

Growing season	Treatments	Plant height (cm)	Number of leaves	Flag Leaf area (cm ²)	Dry weight per plant (g)	Protein Content (%)	Total Chlorophyll (%)
2009-2010	S ₁ IF ₁	117.90 b	4.333 c	22.000 bc	4.233 c	10.433 cd	29.700 d
	S ₁ IF ₂	121.17 a	5.667 ab	29.333 a	5.100 ab	12.100 ab	37.000 b
	S ₁ IF ₃	123.17 a	6.000 a	31.667 a	5.333 a	12.700 a	43.067 a
	S ₂ IF ₁	115.17 d	3.667 c	20.667 c	3.600 d	10.067 d	24.067 e
	S ₂ IF ₂	116.60 bc	4.333 c	24.333 b	4.667 bc	10.833 c	32.067 c
	S ₂ IF ₃	117.17 bc	5.167 b	29.667 a	4.767 abc	11.700 b	37.300 b
	L.S.D.	2.541	0.755	2.828	0.596	0.631	1.357
2010-2011	S ₁ IF ₁	118.67 c	4.667 bc	22.667 bc	4.667 c	10.433 e	29.433 d
	S ₁ IF ₂	121.00 a	5.333 a	28.333 a	5.100 ab	12.000 b	37.700 b
	S ₁ IF ₃	121.33 ab	6.000 a	31.333 a	5.400 a	12.733 a	42.867 a
	S ₂ IF ₁	115.33 d	4.000 c	21.000 c	4.000 d	10.200 f	25.333 e
	S ₂ IF ₂	117.00 b	4.667 b	25.333 b	4.567 bc	10.800 d	32.367 c
	S ₂ IF ₃	117.67 bc	4.667 a	26.667 a	4.867 b	11.533 c	38.233 b
	L.S.D.	0.492	2.828	2.828	0.492	0.304	1.160
2009-2010		119.863	4.861	26.278	4.617	11.306	33.867
2010-2011		118.500	4.889	25.889	4.767	11.283	34.322
L.S.D.		ns	ns	ns	ns	ns	ns

Note: Numbers followed by different letters are statistically different ($P < 0.05$).

The protein content varied from 10.067 to 12.700 % in 2009-2010, and 10.20 to 12.733 % in 2010-2011. Protein content and total chlorophyll had the highest values under S₁IF₃ and the lowest values were obtained under S₂IF₃. The values of protein content and total chlorophyll under solid set sprinkler (S₁) were higher than of those under hand move laterals (S₂) and the protein content decreased with decreasing irrigation frequency.

There was a statistically significant difference in plant height, number of leaves per plant, flag leaf area, dry weight per plant, protein content and total chlorophyll between treatments but there was a statistically no significant difference between experimental years ($P < 0.05$).

3.5. Nutrient use efficiency

There were significant differences in the nitrogen, phosphorus and potassium use efficiency among the studied sprinkler irrigation systems and irrigation frequencies during both seasons of study but there was a statistically no significant difference between experimental years ($P < 0.05$) (Table 6).

The highest NUE, PUE and KUE were obtained under S_1IF_3 and the lowest values were obtained under S_2IF_1 . There was a direct relationship between irrigation frequency and the NUE, PUE and KUE under the two types of sprinkler irrigation systems.

The NUE varied from 14.80 to 25.967 in 2009-2010, and 15.20 to 6.70 in 2010-2011, on the other hand the PUE values varied from 44.433 to 78.133 in 2009-2010, and 45.560 to 80 in 2010-2011, while the values of KUE varied from 56.233 to 97 in 2009-2010, and 56.933 to 100 in 2010-2011.

The high the nutrient use efficiency the high the yield obtained, in this regard, the highest yield obtained under S_1IF_3 where the highest nutrient use efficiencies were adopted. Similarly the lowest yield was under S_2IF_1 where the lowest NUE, PUE and KUE were obtained.

Table 6. The fertilizers use efficiency of wheat in different years and treatments

Growing season	Treatments	NUE	PUE	KUE
2009-2010	S_1IF_1	17.800 c	53.667 c	66.667 c
	S_1IF_2	22.567 b	67.800 b	84.700 b
	S_1IF_3	25.967 a	78.133 a	97.200 a
	S_2IF_1	14.800 d	44.433 d	56.233 d
	S_2IF_2	18.533 c	54.567 c	69.433 c
	S_2IF_3	22.567 b	67.800 b	84.700 b
	L.S.D.	1.124	2.114	3.351
2010-2011	S_1IF_1	16.700 c	50.000 c	62.500 c
	S_1IF_2	23.300 b	70.000 b	87.500 b
	S_1IF_3	26.700 a	80.000 a	100.000 a
	S_2IF_1	15.200 d	45.560 d	56.933 d
	S_2IF_2	19.633 c	58.867 c	73.633 c
	S_2IF_3	23.300 b	70.000 b	87.500 b
	L.S.D.	1.124	1.868	3.510
2009-2010		20.372	61.067	76.489
2010-2011		20.806	65.773	78.011
L.S.D.		ns	ns	ns

Note: Numbers followed by different letters are statistically different ($P < 0.05$).

3.6. Soil water content before and after irrigation

The soil moisture distribution before irrigation was uniformly distributed at 15-30 cm soil layer where contour lines were approximately parallel to

each other. Soil moisture values reached to $5 \text{ cm}^3.\text{cm}^{-3}$ at 15-20 cm soil depth and it decreases towards the soil surface where the soil moisture content was $3 \text{ cm}^3.\text{cm}^{-3}$ (Fig. 2).

The soil moisture distribution after irrigation was uniformly distributed at 15-37.5 cm soil layer where contour lines were approximately parallel to each other. Soil moisture values reached to $12 \text{ cm}^3.\text{cm}^{-3}$ around 25 cm soil depth and it increases towards the soil surface where the soil moisture content was higher than $\geq 14 \text{ cm}^3.\text{cm}^{-3}$ (Fig. 3). However, after irrigation the soil moisture value was high below the sprinkler and reduced gradually towards the middle of the distance between sprinklers. The uniformity of soil moisture distribution and its variation from one site to another is due to soil matric potential at the same soil depth as well as to the total hydraulic potential at different soil depths because of the soil moisture movement direction.

The moisture distribution after irrigation (Fig. 3), the soil moisture content reached to $14.5 \text{ cm}^3.\text{cm}^{-3}$ at surface layer (0-10 cm) under S_1IF_1 and S_2IF_1 and it decreased with increasing irrigation frequency till $13.5 \text{ cm}^3.\text{cm}^{-3}$ under IF_3 for both sprinkler irrigation systems. The soil moisture content gradually decreased with increasing the soil depth reaching only to $10 \text{ cm}^3.\text{cm}^{-3}$ at 40 cm soil depth.

The distribution uniformity of soil moisture can be assessed by using parallel contour lines as demonstrate in Fig 2 and 3 along the lateral for the two investigated measuring times before and after irrigation respectively. The distribution uniformity before irrigation demonstrate that the uniformity of soil moisture distribution is between 10 and 30 cm. However, this was not the case after irrigation where uniformity of soil moisture distribution found between 15 cm and 40 cm soil depth.

The presented data indicated that there was a gradual increase in soil moisture content with the increment of soil depth before irrigation. The upper surface layer had the lowest moisture content $3 \text{ cm}^3.\text{cm}^{-3}$. On the other hand there was an inverse relationship between soil moisture content and soil depth after irrigation, that upper surface layer had the highest moisture content $\geq 14 \text{ cm}^3.\text{cm}^{-3}$, and it decreased with the increment of soil depth.

The similarity in the data obtained along laterals between the two sprinkler irrigation systems indicates that, the variation in the moisture content and distribution uniformity are totally depending on the variation in the total hydraulic potential from one layer to another within the soil profile before and after irrigation.

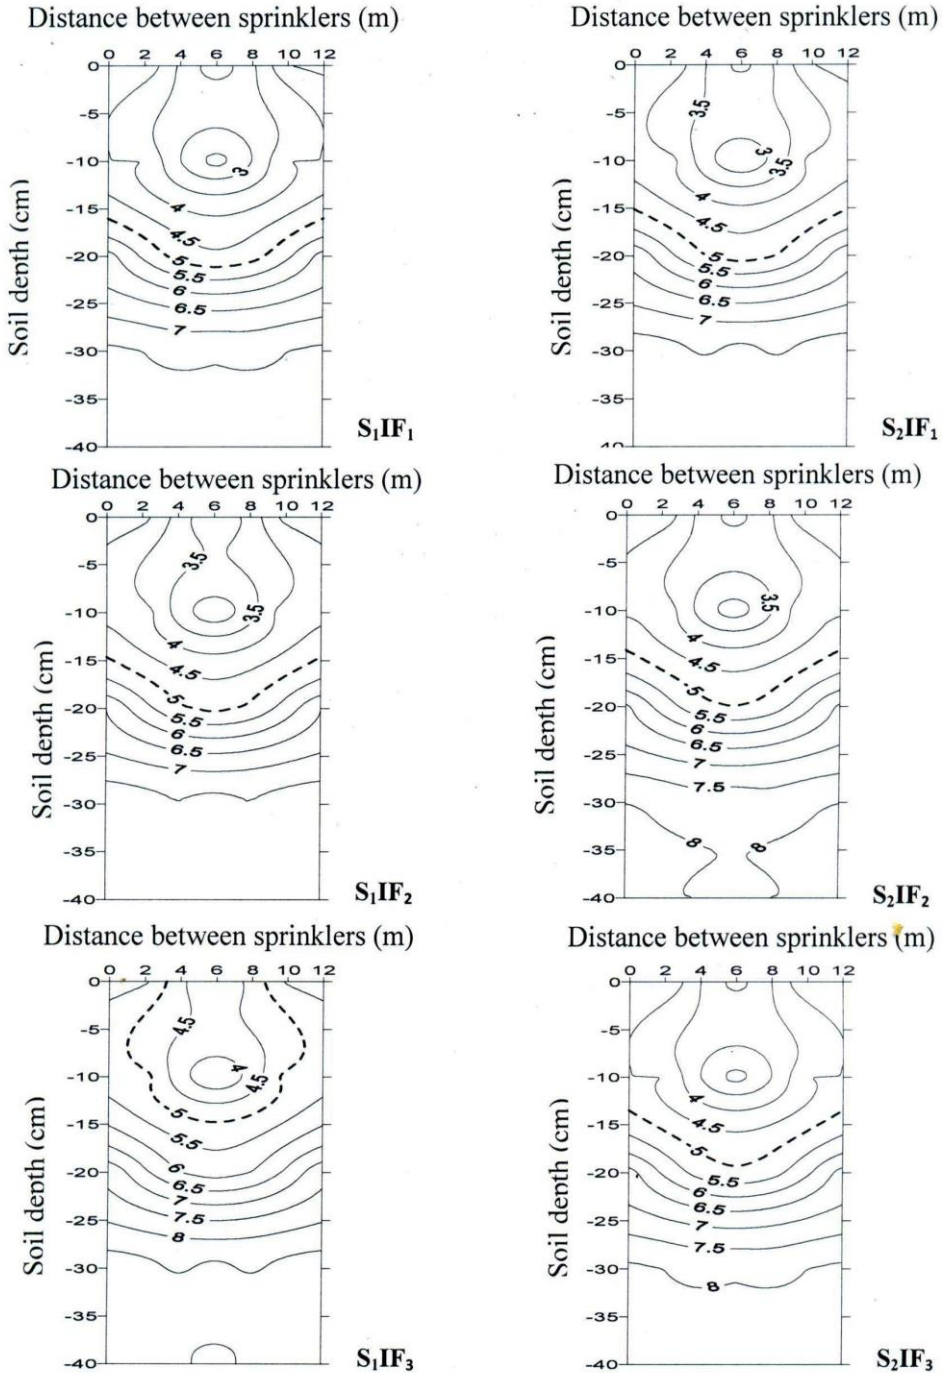


Figure 2. Volumetric soil moisture distribution before irrigation under solid set and hand move sprinkler irrigation systems for different irrigation frequency

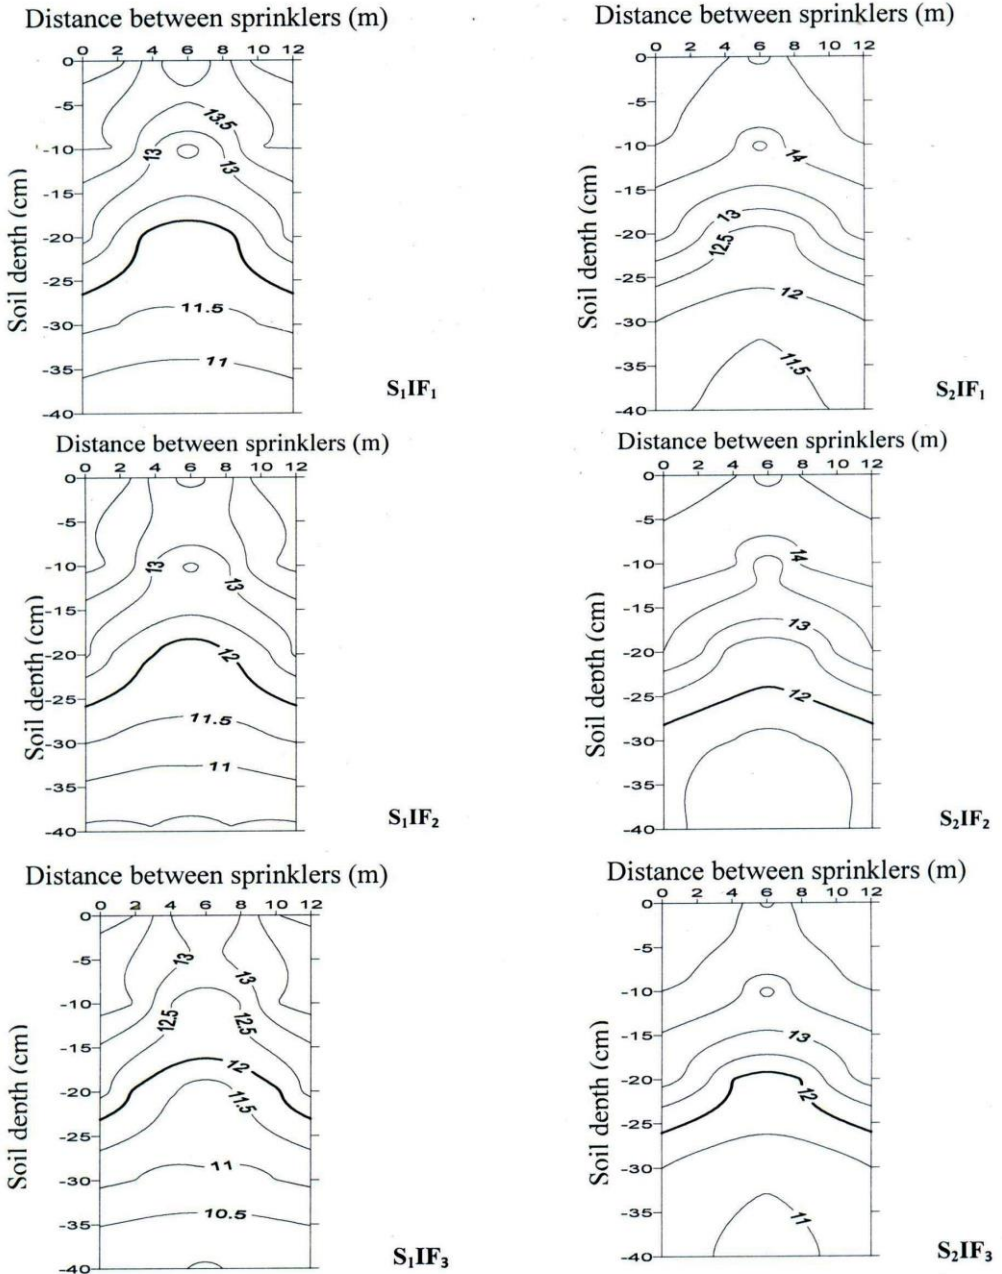


Figure 3. Volumetric soil moisture distribution immediately after irrigation under solid set and hand move sprinkler irrigation systems for different irrigation frequency

3.7. Water stress

The water content was close to the wilting point ($5\text{cm}^3.\text{cm}^{-3}$) before irrigation and higher than field capacity ($12\text{cm}^3.\text{cm}^{-3}$) after irrigation

(Fig. 4 and Fig. 5). S_1IF_1 and S_2IF_1 treatments were closer to the wilting point before irrigation and closer to field capacity after irrigation than the other treatments because of the greater amount of water per irrigation. In line with Meiri et al. (1992), plants receiving infrequent irrigation took more water from soil reserves. Soil water content of treatments irrigated with higher irrigation frequency was higher than of those with lower irrigation frequency both before and after irrigation due to the much greater amounts of applied water.

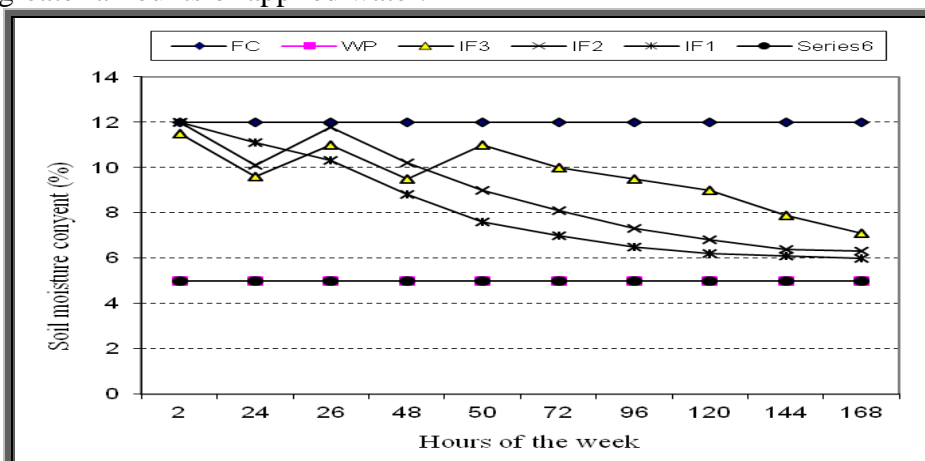


Figure 4. Water stress under solid set sprinklers for different irrigation frequency treatments

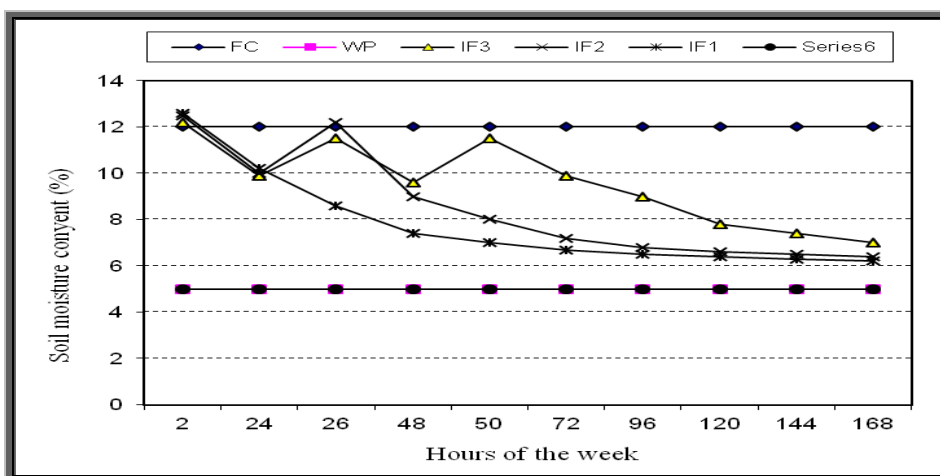


Figure 5. Water stress under hand move laterals for different irrigation frequency treatments

As stated in **Meiri et al. (1992)**, plants took up more water from soil in infrequently irrigated treatments. In general, soil water content before and after irrigation gradually increased towards the end of the season when temperatures were higher. This might be due to the fact that irrigation could not fully compensate for evapotranspiration (ET) loss. However, because much more water was applied with increasing irrigation frequency, the soil water content of treatments with high irrigation frequency event (IF₃) were higher than IF₁ and IF₂ before and after irrigations. That is why there was more water in the soil profile in the IF₃ than in all the other treatments and also that is why plants does not severe from water stress under sprinkler irrigation systems with IF₃ and the water stress with decreasing irrigation frequently.

4. CONCLUSIONS

In this study, our results demonstrate that the effect of irrigation frequency applied with a sprinkler systems and water use is significantly important in order to obtain higher yields of wheat under climatic conditions of El-Nubaria region in Egypt.

1. For sprinkler irrigation field, soil water content varied apparently in the 0–40-cm soil layer. The water movement is totally depending on the variation in the total hydraulic potential from one layer to another within the soil profile.
2. Controlled ranges of soil water content affected all evapotranspiration, grain yield, and WUE of wheat during growing seasons. Grain yield response to irrigation varied considerably due to differences in soil moisture contents. Wheat yields obtained from solid set sprinkler irrigation in El-Nubaria region of Egypt were found to be higher than of those under hand move laterals. Highest average grain yield (6000 kg.ha⁻¹) was obtained from (S₁IF₃). Irrigation frequency affected wheat yield. The sprinkler system permitted precise control of irrigation applications. With proper management, sprinkler irrigation can avoid some application losses.
3. In areas with negligible rainfall, irrigations should be scheduled to replace water used for ET, or slightly increase it for highest yield. Yield and yield components, IWUE, WUE and dry weight per plant of

wheat are differently affected by water stress in relation to its timing and intensity. There is no significant variations in grain yield, IWUE and WUE between seasons can be attributed to small seasonal differences in the temperature, humidity, solar radiation and wind speed during the growing stages of wheat.

4. Leaf area, number of leaves per plant, dry weight per plant, Protein content and total chlorophyll were significantly affected by irrigation frequency under both sprinkler irrigation systems. The highest yield was obtained under S_1IF_3 and the lowest one was under S_2IF_1 . There were no significant differences between experimental years.
5. The highest NUE, PUE and KUE were obtained under S_1IF_3 and the lowest values were obtained under S_2IF_1 . The wheat yield and vegetative growth parameters affected by the NUE, PUE and KUE.
6. For winter wheat in the El-Nubaria, the recommended sprinkler system and irrigation frequency for each event is solid set sprinkler (S_1) and irrigation three times per week (IF_3).

REFERENCES

- Abuarab, M. E.; M. El-Mogy and A. M. Lotfy (2011).** Response of green bean to pulse subsurface trickle irrigation. *Misr Journal of Agric. Eng.* 28(4): 217-236.
- Alderfasi, A. A. and D. C. Nielsen (2001).** Use of crop water stress index for monitoring water status and scheduling irrigation in wheat. *Agricultural Water Manage* 47 (1): 69–75.
- Chapman, H. D. and R. F. Pratt (1978).** Methods analysis for soil, plant and water. University of California Div. Agric. Sci. 16-38.
- Chen, Z. (1996).** Analysis on agro-meteorological effect on mulberry field under sprinkler irrigation condition. *Journal Hangzhou University (Nat. Sci. Div.)* 23 (1): 92–99.
- Christiansen, J. E. (1942).** Irrigation by sprinkling. California Agricultural Experiment Station Bulletin, P.670.
- Dallyn, P. (1983).** Crop water requirement under arid conditions. In: Holmes, J.C., Tahir, W.M. (Eds.), *More Food from Better Technology*. FAO, Rome, Italy, pp. 383–392.

- Dalvi, V. B.; K. N. Tiwari; M. N. Pawade and P. S. Phirke (1999).** Response surface analysis of tomato production under microirrigation. *Agricultural Water Manage* 41: 11–19.
- FAO (2000).** Crops and drops: Making the best use of water for agriculture. FAO Advance Edition, Rome.
- Freeman, B. M.; J. Blackwell and K. V. Garzoli (1976).** Irrigation frequency and total water application with trickle and furrow systems. *Agricultural Water Manage* 1: 21–31.
- Goldberg, D.; B. Gornat and D. Rimon (1976).** Drip irrigation principles design and agricultural practices. *Drip Irrig. Sci. Pub.*, Israel, p. 295.
- Haijun, L.; Y. Lipeng; L. Yu; W. Xiangping and H. Guanhua (2011).** Responses of winter wheat (*Triticum aestivum* L.) evapotranspiration and yield to sprinkler irrigation regimes. *Agricultural Water Management* 98: 483-492.
- Howell, T. A.; R. H. Cuence and K. H. Solomon (1990).** Crop yield response. In: Hoffman GJ., et al. (Eds.), *Management of farm irrigation systems*. ASAE, St. Joseph, MI; p. 312.
- Kanber, R.; O. Tekinel; N. Baytorun and Y. Kumova (1991).** Estimation of the most suitable irrigation frequencies and quantities in cotton in harran plain by using free pan evaporation coefficient, 44. The Republic of Turkey Prime Ministry GAP-Regional Development Administration, GAP Publications, pp. 15–25.
- Keller, J. and R. D. Bliesner (1990).** *Sprinkler and trickle irrigation*. Van Nostrand Reinhold, New York.
- Li, J. and M. Rao (2003).** Field evaluation of crop yield as affected by nonuniformity of sprinkler-applied water and fertilizers. *Agricultural Water Manage* 59: 1–13.
- Meiri, A.; H. Frenkel and A. Mantell (1992).** Cotton response to water and salinity under and drip irrigation. *Am. Soc. Agron.*, Madison, WI 84 (1): 44–50.

- Mishra, H. S.; T. R. Rathore and V. S. Tomar (1995).** Water use efficiency of irrigated wheat in the Terai region of India. *Irrigation Science* 16: 75–80.
- Moll, R. H.; E. J. Kamprath and W. A. Jackson (1982).** Analysis and interpretation of factors which contribute to efficiency of nitrogen utilization. *Agronomy Journal* 74: 562-564.
- Radin, J. W.; J. R. Mauney and P. C. Kerridge (1989).** Water uptake by cotton roots during fruit filling in relation to irrigation frequency. *Crop Sci.* 29: 1000–1005.
- Rosegrant, M. W. and X. Cai (2000).** Modeling water availability and food security-a global perspective: The IMPACT-Water Model. Working Draft. International Food Policy Research Institute, Washington, DC.
- Segal, E.; A. Ben-Gal and U. Shani (2000).** Water availability and yield response to high-frequency micro-irrigation in sunflowers. In: Proceedings of the Sixth International Micro-irrigation Congress on ‘Micro-irrigation Technology for Developing Agriculture’, Conference Papers, 22–27 October, South Africa.
- Seregeldin, I. (1999).** Looking ahead: water, life and the environment in the 21st century. *Journal of International Water Resources Dev.* 15 (1 and 2): 17–27.
- Sharmasarkar, F. C.; S. Sharmasarkar; S. D. Miller; G. F. Vance and R. Zhang (2001).** Assessment of drip irrigation and flood irrigation on water and fertilizer use efficiencies for sugarbeets. *Agricultural Water Manage* 46: 241–251.
- Silber, A.; G. Xu; I. Levkovitch; S. Soriano; A. Bilu and R. Wallach (2003).** High fertigation frequency: the effects on uptake of nutrients, water and plant growth. *Plant and Soil* 253:467-477.
- Stansell, J. R. and D. A. Smittle (1989).** Effects of irrigation regimes on yield and water use in summer squash. *J. Am. Soc. Hort. Sci.* 114 (2): 196–199.

- Stickler, F.; C. Weaden and A. W. Pauli (1961).** Leaf area determination in grain sorghum. *Agronomy Journal* 53 (3): 187 – 188.
- Taha, M. H. (1999).** Chemical fertilizers and irrigation system in Egypt. 1999. Proceedings of the FAO Regional Workshop on Guidelines for Efficient Fertilizers Use through Irrigation. Cairo, 14–16 Dec. 98.
- Tolk, J. A.; T. A. Howell; J. L. Steiner and D. R. Krieg (1995).** Role of transpiration suppression by evaporation of intercepted water in improving irrigation efficiency. *Irrigation Science* 16: 89–95.
- Wang, F.; Y. Kang and S. Liu (2006).** Effects of drip irrigation frequency on soil wetting pattern and potato growth in North China Plain. *Agricultural Water Manage.* 79: 248–264.
- Xu, G.; I. Levkovich; S. Soriano; R. Wallach and A. Silber (2004).** Integrated effect of irrigation frequency and phosphorus level on lettuce: P uptake, root growth and yield. *Plant and Soil*, 263(1-2): 297-309.
- Yang, X.; F. Chen; F. Gong and D. Song (2000).** Physiological and ecological characteristics of winter wheat under sprinkler irrigation condition. *Trans. Chin. Soc. Agric. Eng.* 16 (3): 35–37.

الملخص العربي

تأثير الري المتكرر تحت نظام الري بالرش النقي والثابت على كفاءة استخدام المياه وإنتاجية القمح

عبد الرؤوف رمضان عيد* محمد السيد ابو عرب**

تم دراسة خصائص الأستهلاك المائي لمحصول القمح في منطقة النوبارية تحت نظام الري بالرش. اشتملت المعاملات على نظامين للري بالرش النظام الثابت والنظام النقي، وثلاث معاملات للري المتكرر وهي مرة واحدة في الأسبوع، الري مرتين في الأسبوع والري ثلاث مرات في الأسبوع. اختلفت كمية المياه الكلية المستخدمة من ٤٥٥٨,١٠٠ إلى ٥٠٩٤,٩٩٢ م^٣هكتار في سنة ٢٠٠٩-٢٠١٠ ومن ٤٧٩٢,٤٥٧ إلى ٥٤٧١,٢٤٣ م^٣هكتار في سنة ٢٠١٠-٢٠١١.

* مدرس الهندسة الزراعية – المركز القومي للبحوث

** مدرس الهندسة الزراعية - كلية الزراعة - جامعة القاهرة

أعلى أستهلاك مائي تم الحصول عليه من النظام النقيالي والري ثلاث مرات في الأسبوع في سنة ٢٠١٠-٢٠١١ وكان ٥٤١٧,٠٧٣ م^٣ هكتار بينما كانت أقل قيمة للأستهلاك المائي تحت النظام الثابت والري مرة واحدة في الأسبوع في سنة ٢٠٠٩-٢٠١٠ وكانت ٤٥١٣,٠٢٩ م^٣ هكتار. أعطت المعاملة الخاصة بالنظام الثابت والري ثلاث مرات في الأسبوع أعلى إنتاجية وكانت ٦٠٠٠ كجم/هكتار، بينما أعطت المعاملة الخاصة بالنظام النقيالي والري مرة واحدة في الأسبوع أدنى إنتاجية وكانت ٣٣٣٢,٥٠٠ كجم/هكتار. أعلى قيمة لكفاءة استخدام مياه الري تم الحصول عليها من النظام الثابت والري ثلاث مرات في الأسبوع وكانت ١,١٧٩ كجم/م^٣ و ١,١٥١ كجم/م^٣ في سنة ٢٠٠٩-٢٠١٠ و ٢٠١٠-٢٠١١ على التوالي، بينما تم التحصل على أقل قيمة من المعاملة الخاصة بالنظام النقيالي والري مرة واحدة في الأسبوع وكانت ٠,٧١٠ كجم/م^٣ و ٠,٦٩٩ كجم/م^٣ في سنة ٢٠٠٩-٢٠١٠ و ٢٠١٠-٢٠١١ على التوالي. أعلى قيمة لكفاءة الاستخدام المائي تم الحصول عليها من النظام الثابت والري ثلاث مرات في الأسبوع وكانت ١,١٩١ كجم/م^٣ و ١,١٦٣ كجم/م^٣ في سنة ٢٠٠٩-٢٠١٠ و ٢٠١٠-٢٠١١ على التوالي، بينما تم التحصل على أقل قيمة من المعاملة الخاصة بالنظام النقيالي والري مرة واحدة في الأسبوع وكانت ٠,٧١٧ كجم/م^٣ و ٠,٧٠٦ كجم/م^٣ في سنة ٢٠٠٩-٢٠١٠ و ٢٠١٠-٢٠١١ على التوالي. أعلى كفاءة لأستخدام النيتروجين والفسفور والبوتاسيوم تم التحصل عليها من النظام الثابت والري ثلاث مرات في الأسبوع بينما كانت أقل قيمة تحت النظام النقيالي والري مرة واحدة في الأسبوع. المحتوى الرطوبي في التربة كان يتغير بصورة واضحة في الطبقة من ٤٠-٠ سم من سطح التربة. بالنسبة لمحصول القمح في منطقة النوبارية يوصى بإستخدام الري بالرش الثابت والري ثلاث مرات في الأسبوع.