

## VALIDATION OF SURFACE IRRIGATION MODEL SIRMOD UNDER CLAY LOAM SOIL CONDITIONS IN EGYPT

Mehana, H. M. \*\*, El-Bagoury, K. F. \*, Hussein, M. M. \*\*  
and El-Gindy, A.M.\*

### ABSTRACT

*Surface irrigation (gravity) is the most dominant method currently accounts for 80-85% of irrigation water use in Egypt and surface application is by far the dominant irrigation method applied throughout the world. However, water use efficiencies with surface irrigation methods tend to be low. In recent years a number of surface irrigation simulation models for assessing surface irrigation system performance have been developed. One of the most commonly used models SIRMOD, developed by Utah State University, has seen wide use and evaluation throughout the world particularly by researchers and has been shown to offer potential for increasing surface irrigation water use efficiencies. The use of the SIRMOD model as a management tool for improving irrigation efficiencies was found to be a valuable aid.*

*This study aims to validate SIRMOD model for using in Egypt under clay loam soil conditions. The SIRMOD model adequately describes advance and recession times and infiltrated depth under experimental site conditions for the furrow irrigation practice. In particular, for the experimental site the SIRMOD model provided acceptable predictions for 75 m and 50 m furrow lengths under 0.2% field slope, and for 100 m, 75 m and 50 m furrow lengths under 0.5% field slope at the 1st irrigation. For that, the good predicted values were for the later irrigations than the first one, due to the good relationship between the predicted and measured infiltration depths obtained from SIRMOD model which has high accuracy degree for furrow irrigation management decisions. Generally, predicted advance, recession times and infiltrated depth were highly correlating with measured one at 0.2% field slope more than 0.5% field slope for the two irrigations.*

**Keywords:** SIRMOD model – Furrow irrigation – Soybean – Clay loam soil

---

\*Agri. Eng. Dep., Fac. of Agric. Ain Shams Univ., Cairo, Egypt

\*\* Water Relations & Field Irr. Dept. National Research Centre, Cairo, Egypt.

## INTRODUCTION

Surface irrigation methods within Egypt are currently responsible for greater than 85% of the total irrigated areas and hence make up the dominant method of irrigating both crops and trees. Although well designed and managed furrow-irrigated systems have the potential to operate at application efficiencies above 90% (**Faulkner *et al.* 1998**), many furrow systems operate at significantly lower efficiencies. One of the major constraints to the improvement of furrow irrigation performance has been the difficulty in assessing the many variables associated with furrow irrigation systems and their interactions, and to utilize these in irrigation management. One potential for improving the efficiency and performance of furrow irrigation systems lies in the use of simulation models to simulate and predict furrow irrigation performance and assess changes in management variables, which can lead to improvements in irrigation efficiency. A number of such models have been developed which aim to simulate surface irrigation systems. A few of these models have also been developed into user-friendly computer programs with the ultimate aim of being used by irrigation practitioners as a management tool such as SIRMOD model (**Walker, 1998**).

The SIRMOD model (**Walker, 1998**) simulates the hydraulics of surface irrigation (border, basin and furrow) at the field level. The simulation routine used in SIRMOD is based on the numerical solution of the Saint-Venant equations for conservation of mass and momentum as described by **Walker and Skogerboe (1987)**.

Inputs required for the model to simulate an irrigation event include the infiltration characteristic, hydraulic resistance (Manning's  $n$ ), furrow geometry, furrow slope, furrow length, inflow rate and advance cut-off time. Of these required inputs, the most difficult to determine adequately are the infiltration characteristics and the furrow inflows which often require either relatively expensive equipment or significant periods of time and skilled operators. These inputs have also been found to be the most sensitive in the SIRMOD model (**McClymont *et al.* 1996**). It should also be noted that a number of assumptions made in the SIRMOD model were not always present in the field investigations. These included a step inflow rate to the furrow, which was rarely found in the field data to due

variations in the hydraulic head at the outlets over the irrigation periods. Infiltration characteristics of a furrow are represented in the SIRMOD model with the Kostiakov-Lewis infiltration equation, which is given by:

$$Z = k t^a + f_0 t$$

where  $Z$  is cumulative infiltration ( $m^3/m$  furrow);  $t$  is the time (min) that water is available for infiltration;  $a$ ,  $k$  are fitted parameters; and  $f_0$  ( $m^3/min/m$  furrow) is the steady or final infiltration rate (**Walker and Skogerboe, 1987**).

Infiltration characteristics can be determined from the furrow advance rate as described by **McClymont and Smith (1996)**. The remaining input parameters, furrow geometry, furrow slope and furrow length can be easily measured and the Manning's  $n$  coefficient is generally used as a 'calibrating' parameter. The output from the model includes the advance and recession characteristics, ultimate distribution of infiltrated water and parameters related to water application, storage, efficiencies and runoff hydrographs.

Many surface irrigation systems are designed and/or managed in such a manner that irrigation efficiency is low. Some of the problems associated with furrow irrigation methods are: 1) loss of water by runoff and deep percolation, 2) low uniformity of water application, and 3) high labor and management requirements (**Rogers, 1995**).

The distribution uniformity of an irrigation system depends on both the system characteristics and on managerial decisions (**Pereira, 1999**). The distribution uniformity of different types of irrigation will be influenced by different factors that are characteristic of the particular system. Surface irrigation is influenced primarily by soil intake characteristics. Distribution uniformity (DU) is usually defined as a ratio of the smallest accumulated depths in the distribution to the average depths of the whole distribution. The largest depths could also be used to express DU, but since the low values in irrigation are more critical, the smallest values are used (**Burt et al., 1997**). The average of the smallest depths in the field over the portion of the field. This term is used in the numerator of the DU calculation. A commonly used fraction is the lower quarter, which has

been used by the United States Department of Agriculture (**USDA, 1997**) since the 1940s. This definition has proven useful in irrigated agriculture (**ASCE, 1978**) and leads to the definition of the average low-quarter depth,  $d_{lq}$ . Thus, the average accumulated depth in the quarter of the field receiving the smallest depths is given by (**Burt et al., 1997**):

$$DU_{lq} = \frac{\text{Average low quarter depth } (d_{lq})}{\text{Average depth of water accumulated in all elements } (d_{avg})}$$

Where:

$d_{avg}$  is the total volume accumulated in all elements [ $m^3$ ] divided by the total area of all the elements [ $m^2$ ].

The area of an element depends on the crop being irrigated. In row crops, such as soybean, the elemental area will be the entire field as there is a crop at every point in the field. These definitions allow the elements to be of different sizes by using area weighting (**Burt et al., 1997**).

### **MATERIALS AND METHODS**

To validate the model, observed data was undertaken at the Experimental Farm of the Faculty of Agriculture, Ain Shams University, Kalubia Governorate to represent the old alluvial soil of the Nile Delta. Furrow (with gated pipes) irrigated soybean was selected along two summer growing seasons 2007 and 2008. The furrows were 15 cm depth and 70 cm spacing and leveled using laser technique.

#### **- Soil and irrigation water analysis:**

Soil and irrigation water analysis were conducted according to standard procedures and represented in Table (1, 2 and 3).

Two slopes were selected 0.2% and 0.5%. The experimental area was divided into two plots (100 m x 11 m) with 2.6 m free between plots. Each plot divided into three subplots (100 m x 2.8 m, 75 m x 2.8 m, and 50 m x 2.8 m) with 1 m spacing between subplots. Soybean was planted in 1<sup>st</sup> June, and harvested at 5<sup>th</sup> October, 2007 and 2008 growing seasons. The plants were 20 cm apart in each row, double side cultivation. The inflow to every furrow was 2 l/s. the total volume of irrigated water per season was 3200  $m^3$ /season at the two seasons (2007 – 2008), the same amount of irrigation water was applied. The cutoff time differed from

treatment to another depending on furrow length. The plants putted in the crest of the furrow, for that the Manning values were 0.04 for the 1<sup>st</sup> irrigation and 0.03 for the later irrigations.

**Table (1): Some physical properties of Shalaqan site.**

Sample depth, cm	Particle Size Distribution, %				F.C. %	W.P. %	B.D. g/cm <sup>3</sup>	Texture class
	C. Sand	F. Sand	Silt	Clay				
0-30	3.2	36	19.1	41.7	28	18	1.30	C.L
30-60	3.1	33.2	20.5	43.2	31	20	1.44	C.L
60-100	4.8	28.9	26.1	40.2	29	16	1.46	C.L

F.C.= field capacity (%); PW.P.=permanent wetting point (%), F.C. and PWP were determined as percentage in weight; B.D.= bulk density(g/cm<sup>3</sup>); WHC= available water holding capacity(mm/m); C.L.= clay loam.

**Table(2) : Some chemical properties of Shalaqan site.**


Sample depth, cm	pH	Ec dS/m	Soluble Cations, meq/L				Soluble Anions, meq/L			
			Ca <sup>++</sup>	Mg <sup>++</sup>	Na <sup>+</sup>	K <sup>+</sup>	CO <sub>3</sub> <sup>-</sup>	HCO <sub>3</sub> <sup>-</sup>	SO <sub>4</sub> <sup>-</sup>	CL <sup>-</sup>
0-30	8.1	5.7	22.2	9.4	2.4	1.6	-	1	25.7	9.9
30-60	8.2	2.4	9.8	8.5	2.1	3.5	-	1.3	16.4	6.2
60-100	8.4	2.1	8.7	5.2	1.7	2.5	0.8	1.5	11.3	4.5

**Table (3): Some chemical data of irrigation water at Shalaqan site.**

pH	EC dS/m	Soluble Cations, meq/L				Soluble Anions, meq/L			SAR
		Ca <sup>++</sup>	Mg <sup>++</sup>	Na <sup>+</sup>	K <sup>+</sup>	HCO <sub>3</sub> <sup>-</sup>	SO <sub>4</sub> <sup>-</sup>	CL <sup>-</sup>	
7.9	0.55	1.63	0.77	4.55	1.2	2.8	0.09	5.26	4.11

**- Model validation:**

Three different furrow lengths 50, 70 and 100 m and two slopes 0.2 and 0.5 % were selected to validate the SIRMOD. Furrow geometry was measured (as an average of 30 cross sections of furrows, **Table (4)**) manually by a locally manufactured furrow profile meter **Fig. 2.** and data. Advance and recession times can be taken manually using markers at known distances (25 m).

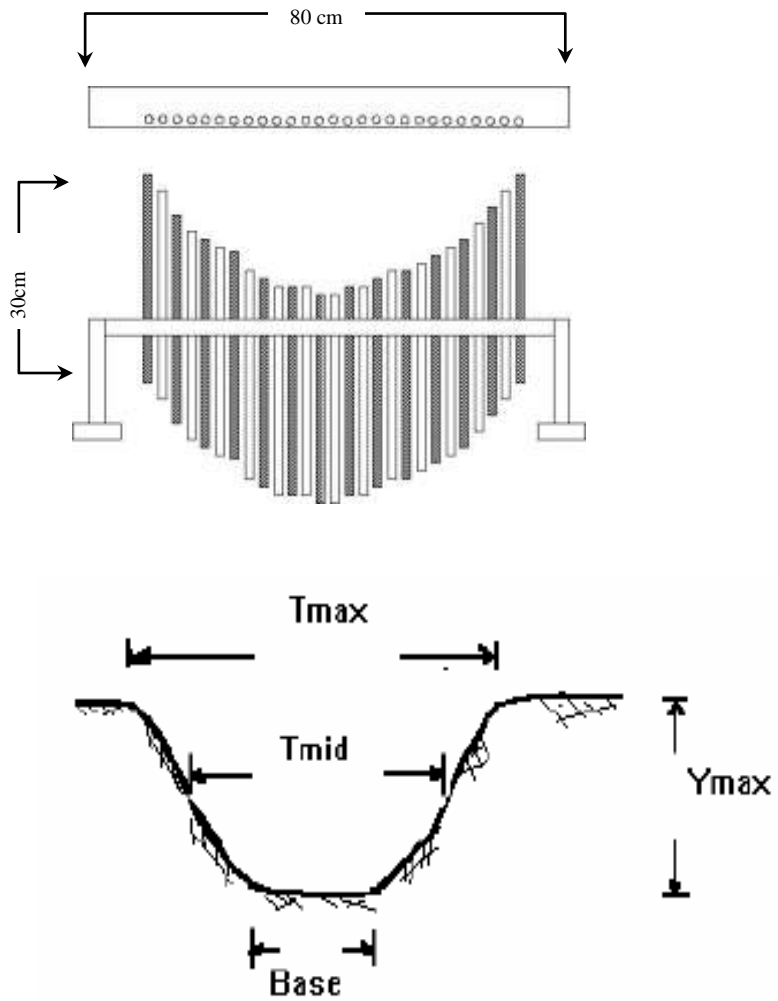

**Fig. 1.** Locally manufactured furrow profile meter

**Table (4):** Unit width flow cross section of furrows.

Parameter	Measured value, m
Top width	0.543
Middle width	0.395
Bottom width	0.121
Maximum depth	0.145

## - SIRMOD model screens:

### 1- Data input:

Data input to the *SIRMOD* software involves two activities: (1) defining the characteristics of the surface irrigation system under study; and (2) defining the model operational control parameters.

A data entry screen is inserted on the main screen with three user-selectable tabs: (1) Field Geometry & Topography; (2) Infiltration Functions; and (3) Flow Cross-Section. **Fig. 2.** shows the field characteristic data entry form opened to the Field Geometry/Topography page. The geometry and topography of the surface irrigated field is described by the following parameters: Manning roughness,  $n$ , for the first irrigations; Manning roughness,  $n$ , for later irrigations; Field length; Field width; Unit spacing for borders and basins, or furrow spacing; Field cross-slope; Three slope values in the direction of flow; and Two distance parameters associated with the three slopes.

The *SIRMOD* software is capable of simulating fields with a compound slope as shown in **Fig. 2.** Three slopes are located in the field by two distance values as shown. When the field has only one slope, the same value needs to be entered for all three slopes and both distance values should be set to the field length.

Field Geometry	Manning - n Values	Unit Width Flow Cross-Section
Field Length, m: 100.0	First Irrigation: 0.040	Top Width (m): 0.543
Field Width, m: 2.8	Later Irrigation: 0.020	Middle Width (m): 0.395
Furrow Spacing, m: 0.50		Bottom Width (m): 0.121
		Maximum Depth (m): 0.145

Slopes	Manning Equation Calculator	Hydraulic Section
First Slope: 0.00200	Slope: 0.00000	Rho1: 0.4115
Second Slope: 0.00200	Manning n: 0.04000	Rho2: 2.8281
Third Slope: 0.00200	Flow, fps: 2.0000	Sigma1: 0.9447
First Distance, m: 50.0	Depth, m: 0.0463	Sigma2: 1.4946
Second Distance, m: 50.0	Area, m <sup>2</sup> : 0.0096	Gamma1: 1.9049
Field Cross Slope: 0.00000	Top Width, m: 0.2071	Gamma2: 0.5653
	Wetted Perimeter, m: 0.3342	Cch: 1.4055
		Cch: 0.6231

**Fig. 2.** Field Characteristics Input Screen

### 2-Type of Simulation Model

The *SIRMOD* software includes three modeling choices: (1) kinematic-wave model; (2) zero-inertia model; and (3) hydrodynamic model. The default is the hydrodynamic model. The user may choose a particular model for simulation by clicking their associated check boxes (**Fig. 3.**).

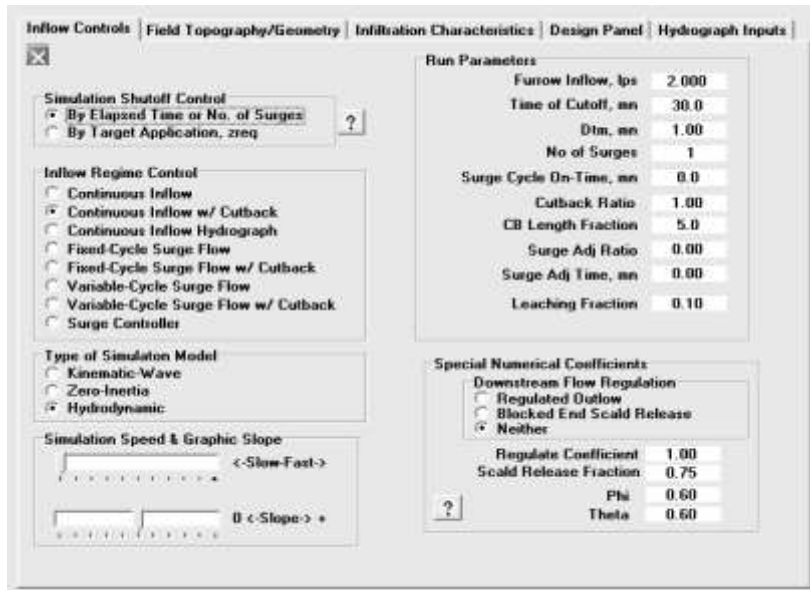


Fig. 3. Inflow controls input

### 3- Infiltration Functions

The tabbed notebook where infiltration functions are defined is shown in Fig. 4. This is the most critical component of the *SIRM* software. Four individual infiltration functions are required: (1) a function for first conditions under continuous flow; (2) a function for later irrigations under continuous flow; (3) a function for first irrigations under surge flow; and (4) a function for later irrigations under surge flow. Each infiltration function requires four parameters,  $k$ ,  $a$ ,  $f_0$ , and  $C$ . Immediately below the four infiltration coefficients for the various surface irrigation regimes are four buttons labeled “Table Values”. These buttons access four default infiltration data sets as illustrated in Fig. 5. These can be selected by clicking on their radio buttons.



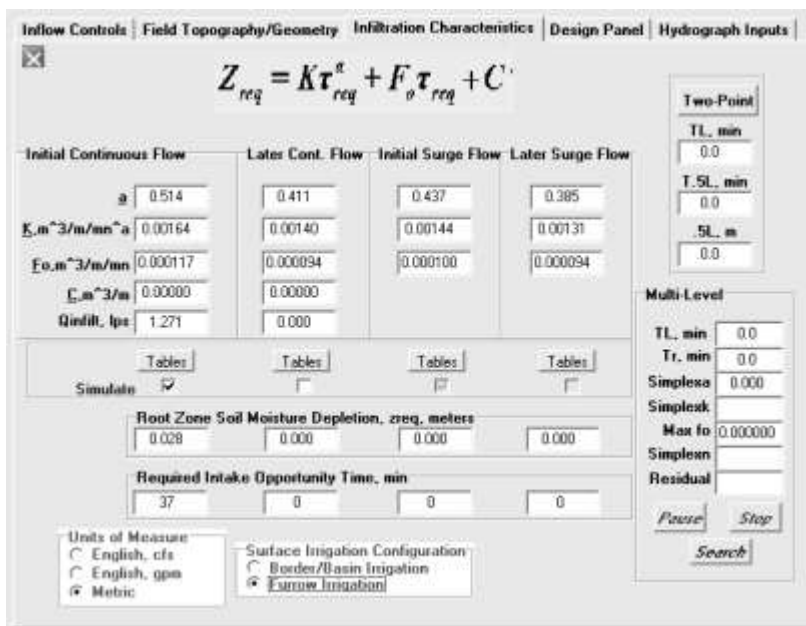


Fig. 4. The Infiltration Input Screen

Continuous Flow Intake Curve Parameters for Initial Irrigations

ID	Soil Name	a	K	Fo	Qr	Wpr
		(m <sup>3</sup> /m/mn <sup>a</sup> )	(m <sup>3</sup> /m/mn)	(lps)	(m)	
<input type="checkbox"/>	.02 Heavy Clay	0.192	0.000240	0.0000136	0.468	0.111
<input type="checkbox"/>	.05 Clay	0.247	0.000446	0.0000217	0.521	0.122
<input type="checkbox"/>	.10 Clay	0.303	0.000633	0.0000323	0.609	0.138
<input type="checkbox"/>	.15 Silty Clay	0.348	0.000790	0.0000429	0.695	0.152
<input type="checkbox"/>	.20 Sil/Sand Clay	0.385	0.000946	0.0000539	0.781	0.166
<input type="checkbox"/>	.25 Sandy Clay	0.416	0.001077	0.0000647	0.866	0.179
<input type="checkbox"/>	.30 Sandy Clay	0.442	0.001200	0.0000755	0.949	0.191
<input type="checkbox"/>	.35 Silty Clay Lo	0.464	0.001326	0.0000863	1.031	0.202
<input type="checkbox"/>	.40 Silty Clay Lo	0.483	0.001433	0.0000969	1.112	0.213
<input checked="" type="checkbox"/>	.45 Clay Loam	0.499	0.001541	0.0001072	1.192	0.224
<input type="checkbox"/>	.50 Clay Loam	0.514	0.001640	0.0001173	1.271	0.234
<input type="checkbox"/>	.60 Sandy Clay Lo	0.537	0.001840	0.0001367	1.426	0.253
<input type="checkbox"/>	.70 Sandy Clay Lo	0.556	0.002021	0.0001550	1.576	0.271
<input type="checkbox"/>	.80 Silt Loam	0.572	0.002182	0.0001722	1.721	0.280
<input type="checkbox"/>	.90 Silt	0.585	0.002344	0.0001883	1.862	0.305
<input type="checkbox"/>	1.00 Loam	0.597	0.002496	0.0002034	1.999	0.320
<input type="checkbox"/>	1.50 Sandy Loam	0.638	0.003140	0.0002655	2.613	0.391
<input type="checkbox"/>	2.00 Loamy Sand	0.666	0.003696	0.0003114	3.115	0.452
<input type="checkbox"/>	4.00 Sand	0.751	0.005511	0.0004130	4.000	0.650

Fig. 5. Default Table Values of Infiltration Coefficients

#### 4- Simulation:

Once the input and control data have been entered, the simulation can be executed by clicking on the button. The simulation screen will appear and the run-time plot of the advance and recession profiles will be shown as illustrated in Fig. 6.

There are three important regions in the simulation screen. The first occupies the upper one-half of the screen and plots the surface and subsurface movements of water as the advance and recession trajectories are computed. The target or required depth of application is plotted as  $Z_{req}$  so that when an infiltrated depth exceeds this value the user can see the loss of irrigation water to deep percolation (The subsurface profile color changes as the depth exceeds  $Z_{req}$ ). In the lower right side of the screen a summary of the simulated irrigation event will be published after the completion of recession. The bottom four edit windows give a mass balance of the simulation, including an error term describing the computed differences between inflow, infiltration, and runoff. As a rule an error less than 5% is acceptable – most simulations will have errors of about 1%. In the lower left side of the screen, a runoff hydrograph will be plotted.


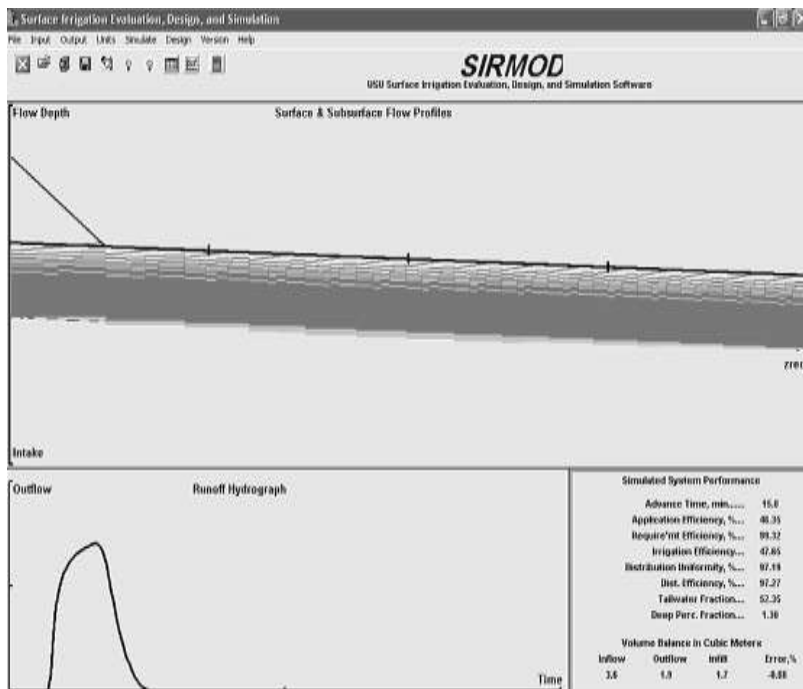


Fig. 6. Simulation Screen

## 5- Plotted Output

Clicking on the **Plotted Results** option under the **Results** menu reveals the plotting screen shown in **Fig. 7**. Three sets of data (Advance, Runoff, and End depth) can be plotted by checking the appropriate box in the output screen shown above.

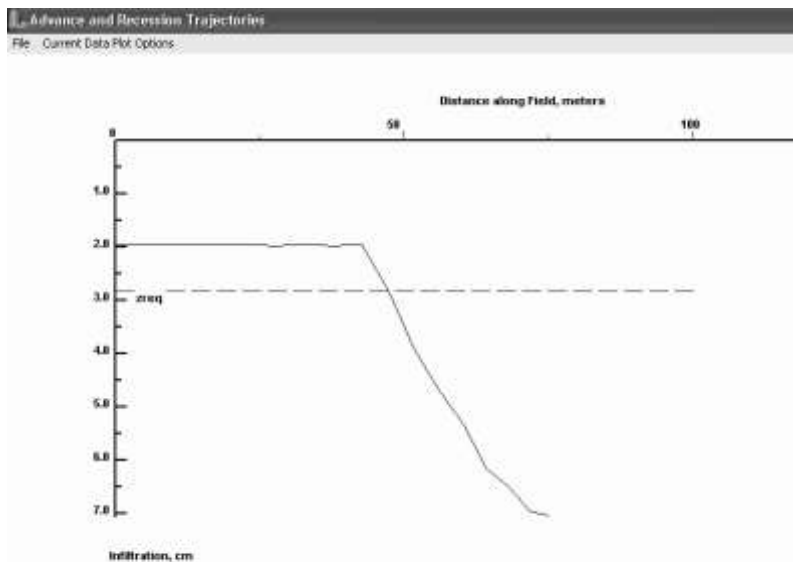


**Fig. 7.** Graphical Output Screen


## RESULTS OF MODEL VALIDATION AND DISCUSSION

The advance, recession times and infiltrated depth of the selected treatment (4 furrow each) were measured. The infiltrated depth was measured by determining the opportunity time (Advance time – recession time).


The input data to the model program are, furrow length, and slope, Manning values were 0.04 for the 1<sup>st</sup> irrigation and 0.03 for the later irrigation, as well as the furrow geometry and the cutoff time, to simulate the hydraulics of surface irrigation under the actual experiment treatments. **Figs. 8, 9, 10, 11, 12** and **13** show the relationship between the measured advance, recession times, and infiltrated depth, and those predicted by the SIRMOD model.

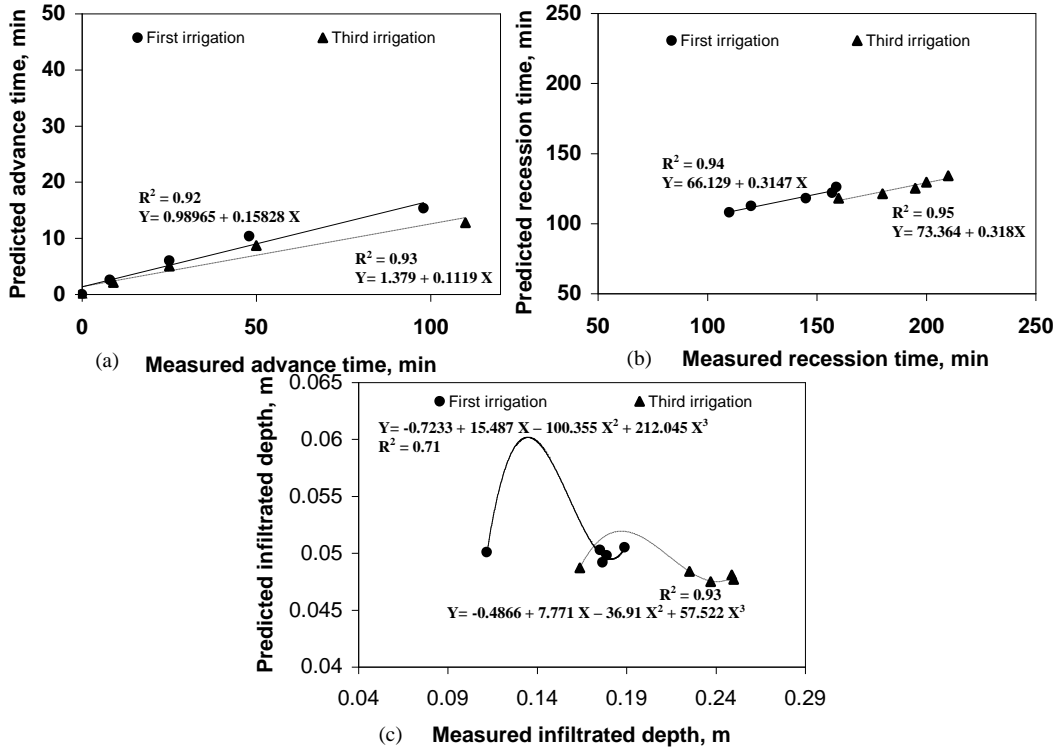

**Fig. 8.** Relationship between observed and simulated advance (a), recession (b), and infiltrated depth (c) under 0.2% field slope and 100 m furrow length.

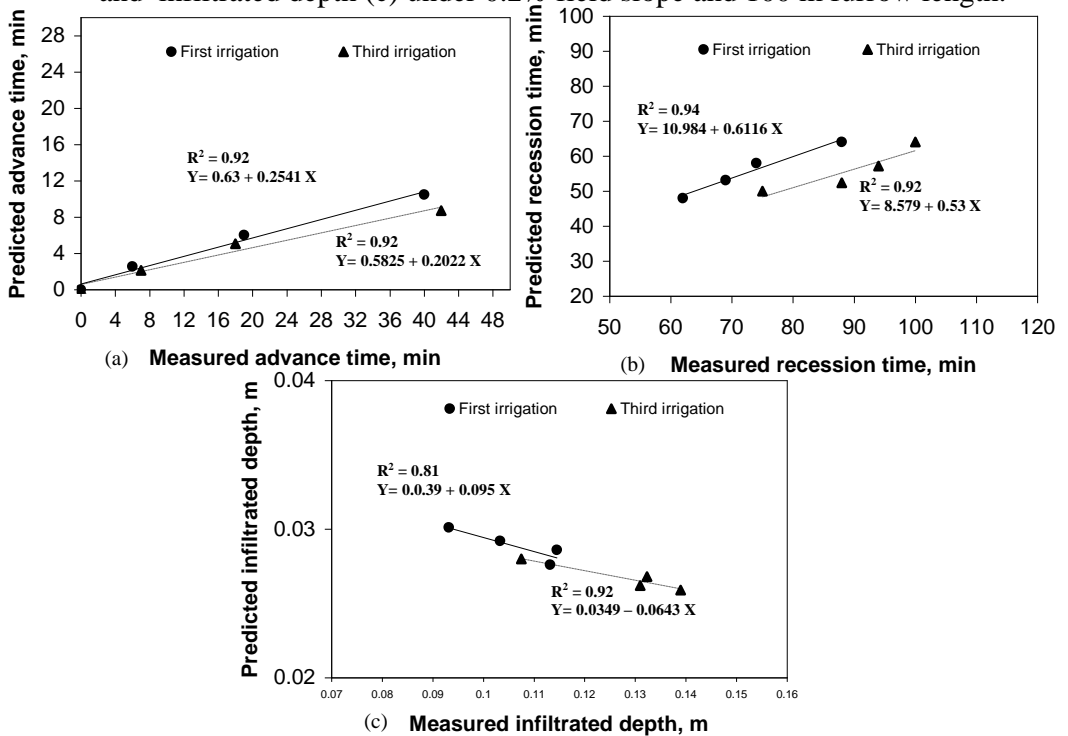


**Fig. 9.** Relationship between observed and simulated advance (a), recession (b), and infiltrated depth (c) under 0.2% field slope and 75 m furrow length.

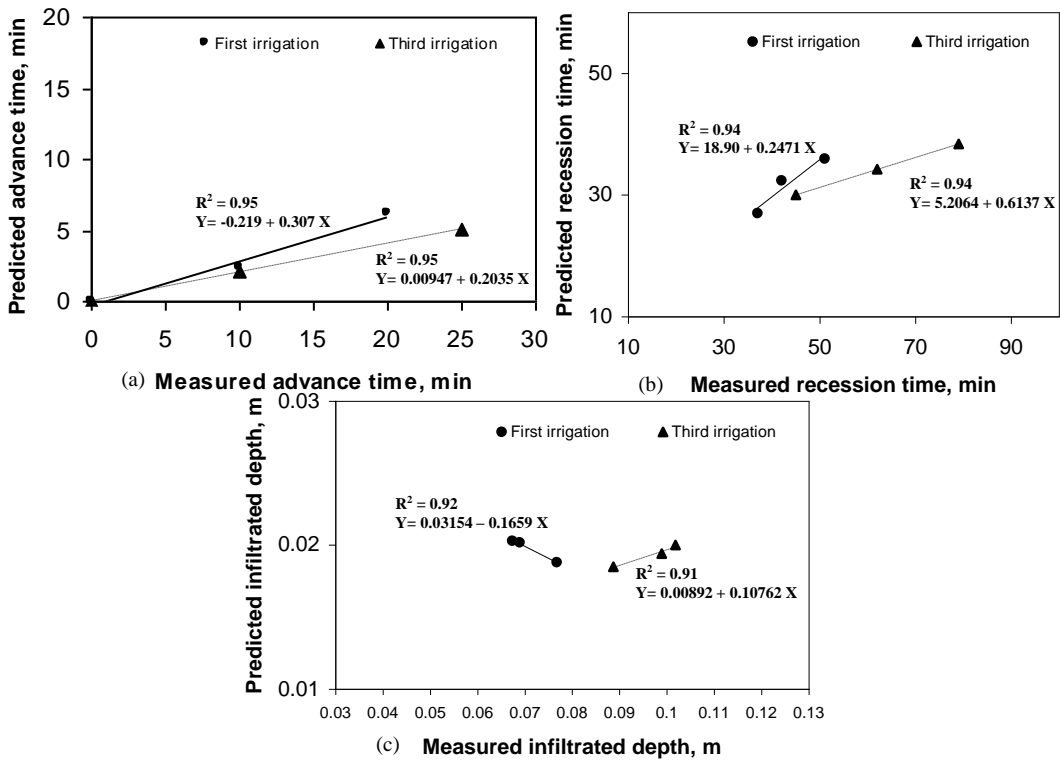


**Fig. 10.** Relationship between observed and simulated advance (a), recession (b), and infiltrated depth (c) under 0.2% field slope and 50 m furrow length.


The regression analysis (illustrated in **Fig. 8,9 and 10**) shows a high correlation ( $0.95 \leq R^2 \leq 0.81$ ) for all relationships between measured and predicted advance and recession times, and infiltrated depth for the three experimental furrow lengths under 0.2 % experimental slope at the first and the third irrigations, indicating that The SIRMOD model provided good predictions of advance and recession times and infiltrated depth at the experimental site conditions for surface irrigation practice, except for infiltrated depth for 100 m furrow length under 0.2 % furrow slope at the first irrigation. The strong correlation of advance time was 0.95 for 0.2% field slope and 50 m furrow length at the two irrigations.

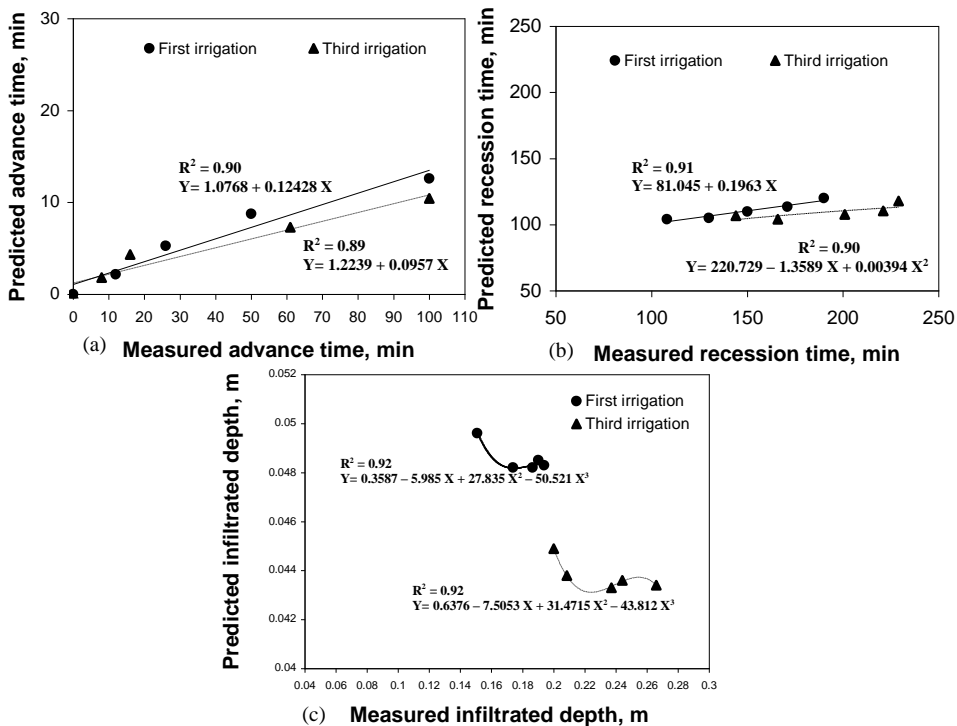

**Fig. 11.** Relationship between observed and simulated advance (a), recession (b), and infiltrated depth (c) under 0.5% field slope and 100 m furrow length.

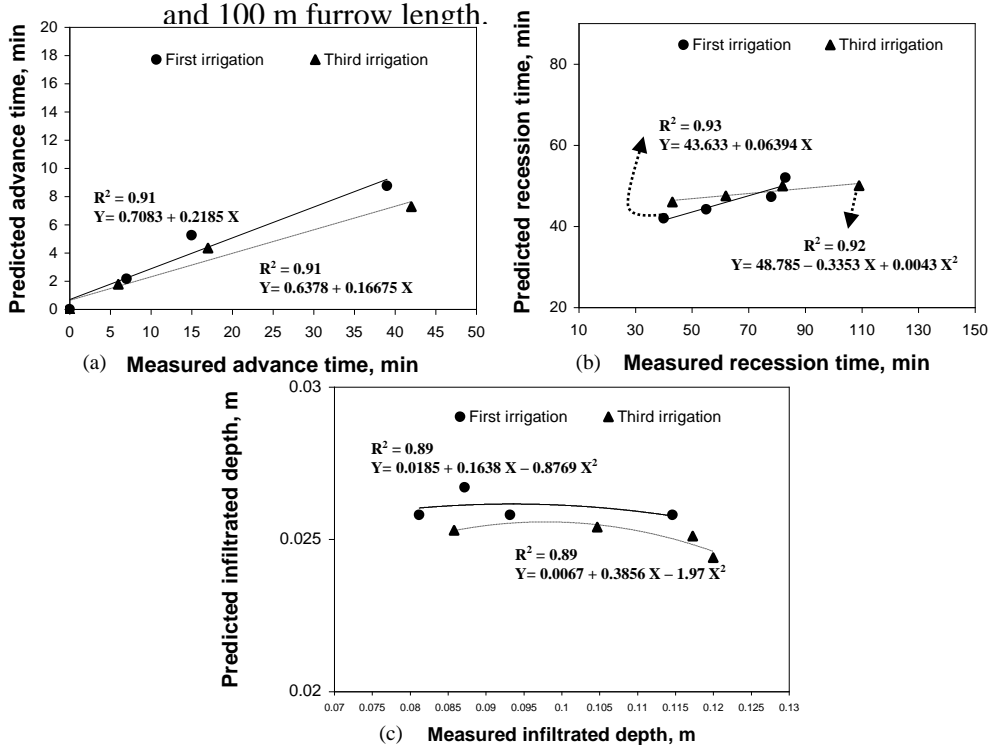

**Fig. 12.** Relationship between observed and simulated advance (a), recession (b), and infiltrated depth (c) under 0.5% field slope and 75 m furrow length.

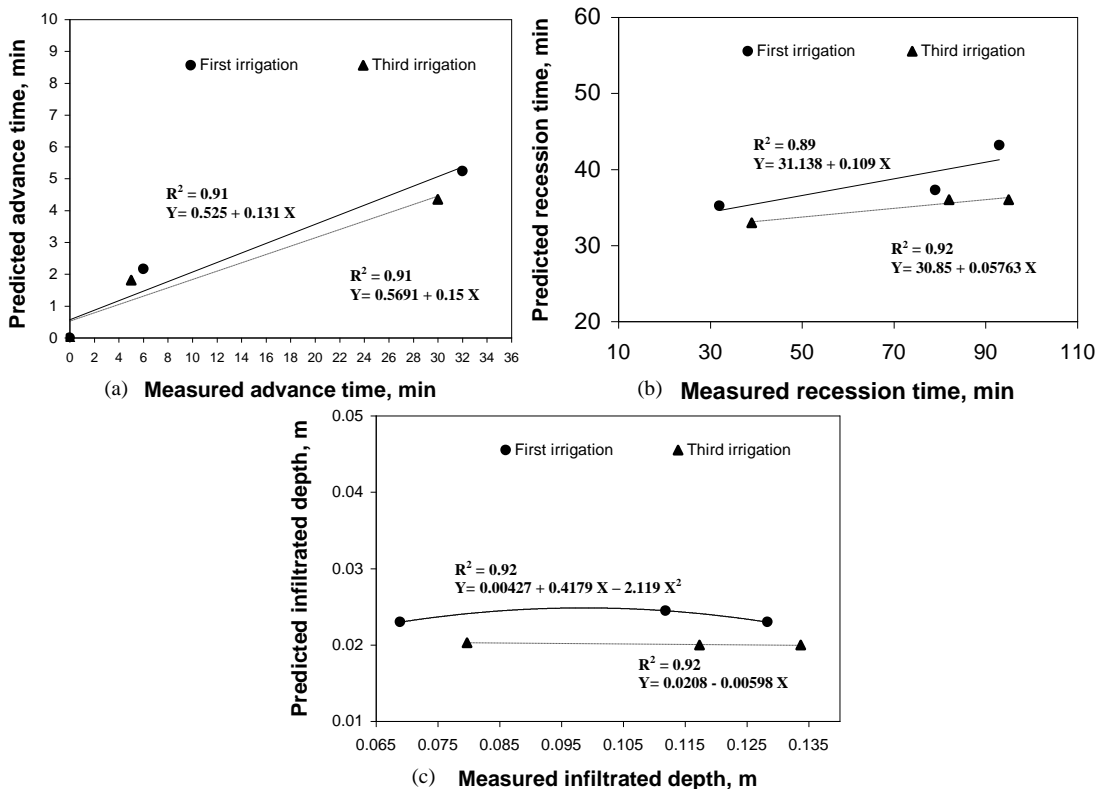


**Fig. 13.** Relationship between observed and simulated advance(a), recession (b), and infiltrated depth (c) under 0.5% field slope

The regression analysis (illustrated in **Fig. 11, 12 and 13**) shows a high correlation ( $R^2 \geq 0.89$ ) for all relationships between measured and predicted advance and recession times, and infiltrated depth for the three experimental furrow lengths under the two experimental slopes at the first and the third irrigations, indicating that The SIRMOD model provided good predictions of advance and recession times, and infiltrated depth at the experimental site conditions for surface irrigation practice.

The relationship between the measured and predicted recession time has the same trend, but the highly correlating was for 75 m furrow length under the 0.5% field slope at the two irrigations, and the lower value of correlation was 0.89 for 50 m furrow length under 0.5% field slope but it acceptable for users to simulate or predict the recession time.

Regression analysis of infiltrated depth show a strong correlation, except the correlation value (0.71) for 100 m furrow length under 0.2% field slope at the first irrigation.

In general, results show that the SIRMOD model adequately describes advance and recession times and infiltrated depth under experimental site conditions for the furrow irrigation practice. In particular, for the experimental site the SIRMOD model provided acceptable predictions for 75 m and 50 m furrow lengths under 0.2% field slope, and for 100 m, 75 m and 50 m furrow lengths under 0.5% field slope at the 1<sup>st</sup> irrigation. For that, the good predicted values were for the later irrigations than the first one, due to the good relationship between the predicted and measured infiltration depths obtained from SIRMOD model which has high accuracy degree for furrow irrigation management decisions. Generally, predicted advance, recession times and infiltrated depth were highly correlating with measured one at 0.2% field slope more than 0.5% field slope for the two irrigations. These results are in the same concern with those obtained from **Hornbuckle and Christan (2005)**.

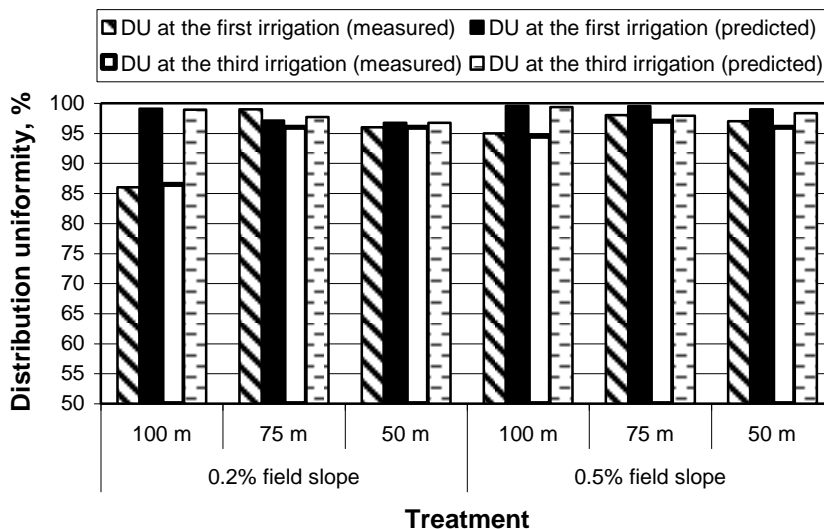

**Fig. 14.** Measured and predicted distribution uniformity (DU).



**Fig. 14.** shows a comparison between the actual distribution uniformity (DU) under the experimental treatments and the predicted by the SIRMOD model. It can be seen that the lowest differences between the predicted and the measured distribution uniformities were by irrigating soybean plants under the shortest experimental furrow lengths ( 50 m and 75 m).

Data obtained in **Table (5)** indicated that the highest soybean yield (2.29, 1.76) ton/fed. were gained by irrigating plants under 75 m furrow length at 0.2% and 0.5% field slopes. The same trend of water use efficiency (WUE) was indicated, whereas the maximum value (0.71) was mentioned by 75 m furrow length and 0.2% field slope. From **Fig. 14.** and **Table (5)**, it can be concluded that there is a relationship between distribution uniformity, and soybean yield. For that, simulation or prediction of hydraulic characteristics of surface irrigation will be better practical decisions for irrigation management (which furrow length and field slope can be used ? ).

**Table 5.** The effect of the field slope and furrow length on soybean yield (ton/fed.) and WUE (kg/m<sup>3</sup>).

Field slope, %	Furrow length, m	Seed yield ton/fed	Water use efficiency, kg/m <sup>3</sup>
0.2	50	1.18	0.37
	75	2.29	0.71
	100	1.58	0.49
0.5	50	1.26	0.39
	75	1.79	0.56
	100	1.87	0.56

### CONCLUSION

The SIRMOD model adequately describes advance and recession times and infiltrated depth under experimental site conditions for the furrow irrigation practice. In particular, for the experimental site the SIRMOD model provided acceptable predictions for 75 m and 50 m furrow lengths under 0.2% field slope, and for 100 m, 75 m and 50 m furrow lengths under 0.5% field slope at the 1<sup>st</sup> irrigation. For that, the good predicted

values were for the later irrigations than the first one, due to the good relationship between the predicted and measured infiltration depths obtained from SIRMOD model which has high accuracy degree for furrow irrigation management decisions. Generally, predicted advance, recession times and infiltrated depth were highly correlating with measured one at 0.2% field slope more than 0.5% field slope for the two irrigations.

### **REFERENCES**

- ASCE (1978).** Describing irrigation efficiency and uniformity. J. Irrig. Drain. Div. 104 (1) 35-41.
- Burt C.M.; A.J. Clemmens; T.S. Strelkof; K.H. Solomon; R.D. Bliesner; L.A. Hardy; T.A. Howell and D.E. Eisnerhauer (1997).** Irrigation performance measures: Efficiency and uniformity. J. Irrig. Drain. Eng. 123 (6) 423-442
- Rogers D. H. (1995).** Managing furrow irrigation systems. IRRIGATION MANAGEMENT S E R I E S, University of Nebraska-Lincoln.
- Faulkner R.D; J. Douglas and D. MacLeod (1998).** The Hydrology of Surface Irrigation for Cotton. Proceedings of National IAA Conference “Water is Gold”. Brisbane, May 1998, pp373-381. ISBN 0 7242 7281 X.
- Hornbuckle, J. W. and E. W. Christen (2005).** Use of SIRMOD as a Quasi Real Time Surface Irrigation Decision Support System. MODSIM 2005 International Congress on Modelling and Simulation. Melbourne, Australia, Modelling and Simulation Society of Australia and New Zealand.
- McClymont, D.; S. Raine and R. Smith (1996).** The Prediction of Furrow Irrigation Performance using the Surface Irrigation Model SIRMOD. 13<sup>th</sup> National Conference. Irrigation Association of Australia. Adelaide.
- McClymont, D. and R. Smith (1996).** Infiltration Parameters from Optimization on Furrow Irrigation Advance Data. Irrigation Science. 17:15-22.
- Pereira L.S. (1999).** Higher performance through combined improvements in irrigation methods and scheduling: a discussion. Agric. Water Manage. 40 (2) 153-169.

Walker, W. (1998). SIRMOD – Surface Irrigation Modeling Software. Utah State University.

Walker, W. and G. Skogerboe (1987). Surface Irrigation Theory and Practice. Prentice-Hall, New York.

USDA. (1997). SRFR v3. US Department of Agriculture. US Water Conservation Laboratory, Phoenix. AZ.

### الملخص العربي

## التحقق من صلاحية استخدام برنامج محاكاة الري السطحي SIRMOD تحت ظروف التربة الطينية- طميية في مصر

هاني محمد مهنا<sup>١</sup>، خالد ظاهر الباجوري<sup>٢</sup>، محمد مرسي حسين<sup>٣</sup>، عبد الغني محمد الجندي<sup>٤</sup>

يستهلك نظام الري السطحي، في الوقت الراهن، حوالي ٨٠ – ٨٥٪ من مياه الري المستخدمة في مصر، حيث أن هذا النظام هو الأكثر انتشاراً كممارسة ري في العالم. تعد كفاءات استخدام مياه الري لهذا النظام منخفضة لذلك وفي السنوات الأخيرة تم نمذجة العديد من برامج المحاكاة للري السطحي لتقييم أداءه تحت ظروف الحقل. يعد نموذج المحاكاة المسمى SIRMOD من أكثر هذه البرامج استخداماً والذي وضعته ونفذته جامعة يوتا بالولايات المتحدة الأمريكية. يستخدم هذا النموذج علي نطاق واسع عالمياً وخاصة من جانب الباحثين، حيث أعطي نتائج جيدة لمحاكاة الري السطحي تحاكي تلك المتحصل عليها في الطبيعة. يعد استخدام النموذج أداة لتحسين كفاءة الري السطحي وقد قدم مساعدة ملموسة في ذلك.

تهدف هذه الدراسة للتحقق من ملائمة هذا النموذج تحت ظروف التربة الطينية- طميية في مصر. بشكل عام بينت النتائج أن النموذج أداة جيدة لمحاكاة الري بالخطوط والتنبؤ بكلا من زمني التقدم والانحسار وكذلك عمق مياه المترشح بالتربة وأخيراً انتظامية توزيع المياه تحت ظروف الري بالخطوط للتربة الطينية – طميية في دلتا مصر. يعطي البرنامج تنبأً لزمني التقدم والانحسار وكذلك عمق المياه المترشح ذو علاقة ارتباط قوية مع تلك البيانات المقاسة في الحقل أثناء عملية الري خلال موسم نمو محصول فول الصويا. حيث يعطي البرنامج تنبأً مقبول تحت ظروف حقل ذو طول ٧٥ متر أو ٥٠ متر تحت ٠,٢٪ ميل خطوط، ولأطوال خطوط ١٠٠ متر و ٧٥ و ٥٠ متر تحت ميل خطوط مقداره ٠,٥٪. بصفة عامة، كانت البيانات المتنبأ بها من خلال البرنامج ذات علاقة ارتباط قوية مع المقاسة في الحقل تحت ظروف ٠,٢٪ ميل خطوط عنه تحت ظروف ٠,٥٪ ميل خطوط. كذلك كان الارتباط بين البيانات المتنبأ بها والمقاسة قوي للريات التي تلي الري الأولى.

- 
- ١ باحث مساعد، قسم العلاقات المائية والري الحقلية، المركز القومي للبحوث، مصر
  - ٢ مدرس بقسم الهندسة الزراعية، كلية الزراعة، جامعة عين شمس، مصر
  - ٣ أستاذ متفرغ، قسم العلاقات المائية والري الحقلية، المركز القومي للبحوث، مصر
  - ٤ أستاذ متفرغ، قسم الهندسة الزراعية، كلية الزراعة، جامعة عين شمس، مصر